TVL

Where Brilliance Meet Innovation, Lighting Happens

CATALOGUE

2025-26


The beauty of
LIGHT
owes its existence to
DARKNESS

PROFILE

We specialize in providing high-quality, energy-e cient LED lighting solutions for a wide range of applications. With a focus on innovation and sustainability, we are dedicated to o ering products that not only brighten spaces but also reduce environmental impact.

Our extensive product lineup includes LED Spot light, Surface light, Track light, Bollard light, Wall light, Foot Light, Street Light etc. lighting solutions designed for homes, businesses, and industrial settings. By using advanced technology and high-performance materials, we deliver products that last longer, consume less energy, and provide superior light quality.

Our goal is to lead the way in lighting technology, providing solutions that help our customers save on energy costs while contributing to a greener planet.

Our Mission

Our mission is to create lighting solutions that not only improve visibility but also help reduce energy consumption and environmental impact. We strive to provide products that deliver long-lasting performance while maintaining exceptional value for our customers.



LED SPOT LIGHT

LED SPOT LIGHT

Product Code

TVL 1002 RD

POWER	DIMENSION (in MM)	CUTOUT (in MM)
4W	Ø70x35(H)	Ø58
7W	Ø88x42(H)	Ø70



BEAM ANGLE	:	24°
LED COLOR	:	3K/4K/5K/6K
BODY COLOR	:	WH
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	HC POWER
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM
REFLECTOR	:	ALU. ANODIZED

LED SPOT LIGHT

Product Code

TVL 1003

POWER	DIMENSION (in MM)	CUTOUT (in MM)
12W	Ø115x60(H)	Ø95
15W	Ø115x60(H)	Ø95
20W	Ø125x75(H)	Ø105
30W	Ø145x90(H)	Ø130
40W	Ø160x100(H)	Ø145
50W	Ø160x100(H)	Ø145



BEAM ANGLE	:	36°
LED COLOR	:	3K/4K/5K/6K / CCT
BODY COLOR	:	WH
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALU. DIE CASTING
REFLECTOR	:	ALU. ANODIZED

LED SPOT LIGHT

Product Code

TVL 1004



POWER	DIMENSION (in MM)	CUTOUT (in MM)
7W	Ø70x58(H)	Ø60
12W	Ø85x80(H)	Ø75
15W	Ø85x80(H)	Ø75
20W	Ø98x90(H)	Ø86

BEAM ANGLE : 36°
LED COLOR : 3K/4K/5K/6K
BODY COLOR : WH, BK
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALU. DIE CASTING
REFLECTOR : ALU. ANODIZED

LED SPOT LIGHT

Product Code

TVL 1005



POWER	DIMENSION (in MM)	CUTOUT (in MM)
9W	Ø70x65(H)	Ø60
12W	Ø83x75(H)	Ø75
15W	Ø83x75(H)	Ø75
20W	Ø94x95(H)	Ø86

BEAM ANGLE : 36°
LED COLOR : 3K/4K/5K/6K / CCT
BODY COLOR : WH, BK
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALU. DIE CASTING
REFLECTOR : ALU. ANODIZED

LED SPOT LIGHT

Product Code

TVL 1006

POWER	DIMENSION (in MM)	CUTOUT (in MM)
12W	Ø82x55(H)	Ø76



BEAM ANGLE : 36°
LED COLOR : 3K/4K/5K/6K
BODY COLOR : WH, BK
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALU. DIE CASTING
REFLECTOR : ALU. ANODIZED

LED SPOT LIGHT

Product Code

TVL 1007

POWER	DIMENSION (in MM)	CUTOUT (in MM)
8W	Ø62x60(H)	Ø55
12W	Ø81x70(H)	Ø65
18W	Ø100x84(H)	Ø95



BEAM ANGLE : 36°
LED COLOR : 3K/4K/5K/6K / CCT
BODY COLOR : WH, BK, GBK
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALU. DIE CASTING
REFLECTOR : ALU. ANODIZED

LED SPOT LIGHT

Product Code

TVL 1008

POWER	DIMENSION (in MM)	CUTOUT (in MM)
15W	Ø82x68(H)	Ø72
25W	Ø114x100(H)	Ø107
30W	Ø114x100(H)	Ø107
36W	Ø119x110(H)	Ø114



BEAM ANGLE : 36°
LED COLOR : 3K/4K/5K/6K
BODY COLOR : WH, BK
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALU. DIE CASTING
REFLECTOR : ALU. ANODIZED

LED SPOT LIGHT

Product Code

TVL 1009

POWER	DIMENSION (in MM)	CUTOUT (in MM)
6W	Ø72x28(H)	Ø65
9W	Ø72x28(H)	Ø65
12W	Ø83x31(H)	Ø75
18W	Ø105x35(H)	Ø95






BEAM ANGLE : 24°/36°
LED COLOR : 3K/4K/5K/6K / CCT
BODY COLOR : WH, BK
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALU. DIE CASTING
REFLECTOR : ALU. ANODIZED

LED SPOT LIGHT

Product Code

TVL 1010

POWER	DIMENSION (in MM)	CUTOUT (in MM)
15W	Ø83x83x83(H)	Ø77x77

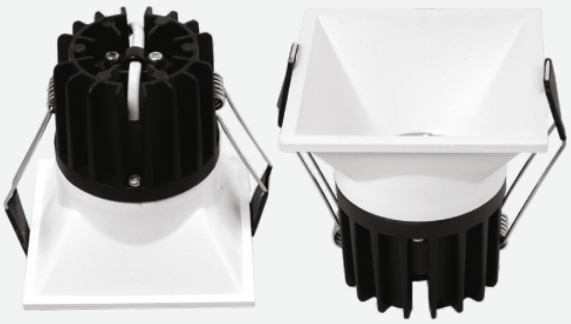

BEAM ANGLE : 36°
LED COLOR : 3K/4K/5K/6K
BODY COLOR : WH, BK
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALU. DIE CASTING
REFLECTOR : ALU. ANODIZED

LED SPOT LIGHT

Product Code

TVL 1010

POWER	DIMENSION (in MM)	CUTOUT (in MM)
2x15W	Ø162x83x83(H)	Ø155x77



BEAM ANGLE : 36°
LED COLOR : 3K/4K/5K/6K / CCT
BODY COLOR : WH, BK
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALU. DIE CASTING
REFLECTOR : ALU. ANODIZED

LED SPOT LIGHT

Product Code

TVL 1011

POWER	DIMENSION (in MM)	CUTOUT (in MM)
10W	Ø85x35(H)	Ø70



BEAM ANGLE : 24°
LED COLOR : 3K/4K/5K/6K
BODY COLOR : WH
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALU. DIE CASTING
REFLECTOR : ALU. ANODIZED

LED SPOT LIGHT

Product Code

TVL 1012

POWER	DIMENSION (in MM)	CUTOUT (in MM)
8W	Ø62x68(H)	Ø55
12W	Ø71x78(H)	Ø65
15W	Ø81x78(H)	Ø75



BEAM ANGLE : 36°
LED COLOR : 3K/4K/5K/6K / CCT
BODY COLOR : WH, BK, GBK
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALU. DIE CASTING
REFLECTOR : ALU. ANODIZED

LED SPOT LIGHT

Product Code

TVL 1013

POWER	DIMENSION (in MM)	CUTOUT (in MM)
6W	Ø35x60(H)	Ø30
8W	Ø45x67(H)	Ø40
12W	Ø55x70(H)	Ø50



BEAM ANGLE	:	36°
LED COLOR	:	3K/4K/5K/6K / CCT
BODY COLOR	:	WH, BK
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALU. DIE CASTING
REFLECTOR	:	ALU. ANODIZED

LED SPOT LIGHT

Product Code

TVL 1014

POWER	DIMENSION (in MM)	CUTOUT (in MM)
8W	Ø68x50(H)	Ø55
12W	Ø83x62(H)	Ø75
20W	Ø102x68(H)	Ø90
30W	Ø130x76(H)	Ø115



BEAM ANGLE	:	36°
LED COLOR	:	3K/4K/5K/6K / CCT
BODY COLOR	:	WH, BK
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALU. DIE CASTING
REFLECTOR	:	ALU. ANODIZED

LED SPOT LIGHT

Product Code

TVL 1015

POWER	DIMENSION (in MM)	CUTOUT (in MM)
9W	Ø91x84(H)	Ø82



BEAM ANGLE : 24°
LED COLOR : 3K/4K/5K/6K
BODY COLOR : WH, BK
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALU. DIE CASTING
REFLECTOR : ALU. ANODIZED

LED SPOT LIGHT

Product Code

TVL 1016

POWER	DIMENSION (in MM)	CUTOUT (in MM)
8W	Ø70x55(H)	Ø65
12W	Ø80x68(H)	Ø75
15W	Ø90x80(H)	Ø85
18W	Ø90x80(H)	Ø85



BEAM ANGLE : 36°
LED COLOR : 3K/4K/5K/6K / CCT
BODY COLOR : WH, BK, WH+BK, BK+COP
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALU. DIE CASTING
REFLECTOR : ALU. ANODIZED

LED SPOT LIGHT

Product Code

TVL 1017

POWER	DIMENSION (in MM)	CUTOUT (in MM)
12W	Ø82x53(H)	Ø75



BEAM ANGLE : 36°
LED COLOR : 3K/4K/5K/6K
BODY COLOR : WH
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALU. DIE CASTING
REFLECTOR : ALU. ANODIZED

LED SPOT LIGHT

Product Code

TVL 1018

POWER	DIMENSION (in MM)	CUTOUT (in MM)
12W	Ø82x53(H)	Ø75



BEAM ANGLE : 36°
LED COLOR : 3K/4K/5K/6K / CCT
BODY COLOR : WH
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALU. DIE CASTING
REFLECTOR : ALU. ANODIZED

LED SPOT LIGHT

Product Code

TVL 1019

POWER	DIMENSION (in MM)	CUTOUT (in MM)
12W	Ø82x54(H)	Ø75



BEAM ANGLE	:	36°
LED COLOR	:	3K/4K/5K/6K
BODY COLOR	:	WH+BK
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALU. DIE CASTING
REFLECTOR	:	ALU. ANODIZED

LED SPOT LIGHT

Product Code

TVL 1020

POWER	DIMENSION (in MM)	CUTOUT (in MM)
12W	Ø82x70(H)	Ø75



BEAM ANGLE	:	36°
LED COLOR	:	3K/4K/5K/6K / CCT
BODY COLOR	:	WH+BK
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALU. DIE CASTING
REFLECTOR	:	ALU. ANODIZED

LED SPOT LIGHT

Product Code

TVL 1023



POWER	DIMENSION (in MM)	CUTOUT (in MM)
9W	Ø70x55(H)	Ø60
12W	Ø85x66(H)	Ø75
15W	Ø85x66(H)	Ø75
18W	Ø95x77(H)	Ø85

BEAM ANGLE : 36°
LED COLOR : 3K/4K/5K/6K / CCT
BODY COLOR : WH, BK, WH/BK+COP
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALU. DIE CASTING
REFLECTOR : ALU. ANODIZED

LED SPOT LIGHT

Product Code

TVL 1025



POWER	DIMENSION (in MM)	CUTOUT (in MM)
8W	Ø75x55(H)	Ø65
12W	Ø88x65(H)	Ø75
18W	Ø95x75(H)	Ø88


BEAM ANGLE : 36°
LED COLOR : 3K/4K/5K/6K / CCT
BODY COLOR : WH+BK
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALU. DIE CASTING
REFLECTOR : ALU. ANODIZED

LED SPOT LIGHT

Product Code

TVL 1029

POWER	DIMENSION (in MM)	CUTOUT (in MM)
2x8W	Ø130x70x90(H)	Ø120x60

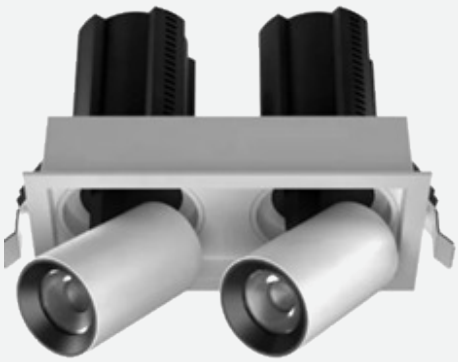

BEAM ANGLE	:	38°
LED COLOR	:	3K/4K/5K/6K / CCT
BODY COLOR	:	WHITE
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALU. DIE CASTING
REFLECTOR	:	ALU. ANODIZED



LED SPOT LIGHT

Product Code

TVL 1030

POWER	DIMENSION (in MM)	CUTOUT (in MM)
7W	Ø72x100(H)	Ø65
12W	Ø85x110(H)	Ø75
15W	Ø98x120(H)	Ø100



BEAM ANGLE : 38°
LED COLOR : 3K/4K/5K/6K
BODY COLOR : WH+BK, BK+BK
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALU. DIE CASTING
REFLECTOR : ALU. ANODIZED

LED SPOT LIGHT

Product Code

TVL 1031

POWER	DIMENSION (in MM)	CUTOUT (in MM)
2x7W	Ø135x72x100(H)	Ø65x125
2x12W	Ø185x98x120(H)	Ø175x90



BEAM ANGLE : 24°
LED COLOR : 3K/4K/5K/6K
BODY COLOR : WH+BK, BK+BK
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALU. DIE CASTING
REFLECTOR : ALU. ANODIZED

LED SPOT LIGHT

Product Code

TVL 1032



POWER	DIMENSION (in MM)	CUTOUT (in MM)
6W	Ø40x56(H)	Ø33
9W	Ø60x82(H)	Ø52
12W	Ø60x100(H)	Ø52
18W	Ø75x95(H)	Ø67

BEAM ANGLE : 36°
LED COLOR : 3K/4K/5K/6K
BODY COLOR : WH, BK, COP
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALU. DIE CASTING
REFLECTOR : ALU. ANODIZED

LED SPOT LIGHT

Product Code

TVL 1038



POWER	DIMENSION (in MM)	CUTOUT (in MM)
8W	Ø65x77(H)	Ø55
12W	Ø85x78(H)	Ø75
18W	Ø110x103(H)	Ø95

BEAM ANGLE : 24°
LED COLOR : 3K/4K/5K/6K / CCT
BODY COLOR : WH, BK, GBK
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALU. DIE CASTING
REFLECTOR : ALU. ANODIZED

LED SPOT LIGHT

Product Code

TVL 1039



in MM

POWER	DIMENSION
10W	Ø50x135(H)
20W	Ø60x150(H)
30W	Ø80x180(H)
40W	Ø80x195(H)

BEAM ANGLE : 24°/36°/60°
LED COLOR : 3K/4K/5K/6K / CCT
BODY COLOR : WH+BK
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALU. DIE CASTING
REFLECTOR : ALU. ANODIZED

LED SPOT LIGHT

Product Code

TVL 1040



in MM

POWER	DIMENSION
12W	Ø50x80(H)

BEAM ANGLE : 36°
LED COLOR : 3K/4K/5K/6K
BODY COLOR : BLACK
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALU. DIE CASTING
REFLECTOR : ALU. ANODIZED



SURFACE SPOT LIGHT

LED SURFACE
SPOT LIGHT
Product Code

TVL 1042

in MM

POWER	DIMENSION
5W	Ø61x21(H)



BEAM ANGLE : 24°
LED COLOR : 3K/4K
BODY COLOR : WH, BK
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALU. DIE CASTING
REFLECTOR : DIFFUSER

LED SURFACE
SPOT LIGHT
Product Code

TVL 1043

in MM

POWER	DIMENSION
7W	Ø65x67(H)
12W	Ø75x75(H)
18W	Ø85x85(H)



BEAM ANGLE : 36°
LED COLOR : 3K/4K/5K/6K
BODY COLOR : WH, BK
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED

LED SURFACE
SPOT LIGHT
Product Code

TVL 1044

in MM

POWER	DIMENSION
12W	Ø90x100(H)



BEAM ANGLE	:	24°
LED COLOR	:	3K/4K/5K/6K
BODY COLOR	:	WH, BK
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM
REFLECTOR	:	ALU. ANODIZED

LED SURFACE
SPOT LIGHT
Product Code

TVL 1045

in MM

POWER	DIMENSION
10W	Ø72x108(H)



BEAM ANGLE	:	36°
LED COLOR	:	3K/4K/5K/6K
BODY COLOR	:	WH, BK
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM
REFLECTOR	:	ALU. ANODIZED

LED SURFACE
SPOT LIGHT
Product Code

TVL 1046

in MM

POWER	DIMENSION
12W	Ø81x111(H)
18W	Ø80x150(H)
30W	Ø80x180(H)





CANNOPY HANGING
AVAILABLE

BEAM ANGLE	:	36°
LED COLOR	:	3K/4K/5K/6K / CCT
BODY COLOR	:	BK+BM, BK+COP
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM
REFLECTOR	:	ALU. ANODIZED

LED SURFACE
SPOT LIGHT
Product Code

TVL 1047

in MM

POWER	DIMENSION
7W	Ø50x105(H)
12W	Ø60x135(H)
15W	Ø80x150(H)
18W	Ø80x150(H)

in MM

POWER	DIMENSION
25W	Ø80x180(H)
30W	Ø80x180(H)
40W	Ø80x195(H)
50W	Ø100x190(H)





CANNOPY HANGING
AVAILABLE

BEAM ANGLE	:	24°/40°/60°
LED COLOR	:	3K/4K/5K/6K
BODY COLOR	:	WH, BK
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALU. DIE CASTING
REFLECTOR	:	ALU. ANODIZED

LED SURFACE
SPOT LIGHT
Product Code

TVL 1048

in MM

POWER	DIMENSION
7W	Ø57x70(H)
12W	Ø70x90(H)



BEAM ANGLE	:	36°
LED COLOR	:	3K/4K/5K/6K
BODY COLOR	:	WH, BK, COP
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM
REFLECTOR	:	LENS

LED SURFACE
SPOT LIGHT
Product Code

TVL 1049

in MM

POWER	DIMENSION	POWER	DIMENSION
7W	Ø50x80(H)	25W	Ø93x150(H)
12W	Ø70x110(H)	30W	Ø93x180(H)
15W	Ø70x150(H)	40W	Ø115x180(H)
18W	Ø70x150(H)	50W	Ø115x200(H)



BEAM ANGLE	:	24°/40°/60°
LED COLOR	:	3K/4K/5K/6K
BODY COLOR	:	WH, BK, COP, GD, CHR
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM
REFLECTOR	:	ALU. ANODIZED

LED SURFACE
SPOT LIGHT
Product Code

TVL 1050

in MM

POWER	DIMENSION
9W	Ø70x100(H)



BEAM ANGLE : 36°
LED COLOR : 3K/4K/5K/6K
BODY COLOR : WH, BK
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED

LED SURFACE
SPOT LIGHT
Product Code

TVL 1051

in MM

POWER	DIMENSION
10W	Ø80x90(H)
12W	Ø80x90(H)
15W	Ø80x90(H)



BEAM ANGLE : 24°
LED COLOR : 3K/4K/5K/6K
BODY COLOR : WH, BK
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED

LED SURFACE
SPOT LIGHT

Product Code

TVL 1052



in MM

POWER	DIMENSION
7W	Ø58x60(H)
12W	Ø72x70(H)
18W	Ø85x80(H)

BEAM ANGLE	:	36°
LED COLOR	:	3K/4K/5K/6K
BODY COLOR	:	WH, BK, RGD, GBK
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM
REFLECTOR	:	ALU. ANODIZED



LED SURFACE
SPOT LIGHT
Product Code

TVL 1054



in MM

POWER	DIMENSION
10W	Ø50x135(H)
20W	Ø60x150(H)
30W	Ø80x180(H)
40W	Ø80x195(H)

BEAM ANGLE	:	24°/40°/60°
LED COLOR	:	3K/4K/5K/6K
BODY COLOR	:	WH, BK
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM
REFLECTOR	:	ALU. ANODIZED

LED SURFACE
SPOT LIGHT
Product Code

TVL 1055



in MM

POWER	DIMENSION
12W	Ø155x32.5x81(H)

BEAM ANGLE	:	30°
LED COLOR	:	3K/4K/5K/6K
BODY COLOR	:	WH, BK
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM
REFLECTOR	:	ALU. ANODIZED


LED DOWN LIGHT

LED PANEL LIGHT

Product Code

TVL 1070

POWER	DIMENSION (in MM)	CUTOUT (in MM)
12W	Ø117x35(H)	Ø100
18W	Ø170x35(H)	Ø150
24W	Ø220x35(H)	Ø200



BEAM ANGLE	:	110°
LED COLOR	:	3K/4K/5K/6K / CCT
BODY COLOR	:	WH
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM
REFLECTOR	:	DIFFUSER

LED PANEL LIGHT

Product Code

TVL 1071

POWER	DIMENSION (in MM)	CUTOUT (in MM)
12W	Ø117x117x35(H)	Ø100x100
18W	Ø170x170x35(H)	Ø150x150
24W	Ø220x220x35(H)	Ø200x200




BEAM ANGLE	:	110°
LED COLOR	:	3K/4K/5K/6K / CCT
BODY COLOR	:	WH
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM
REFLECTOR	:	DIFFUSER

LED PANEL LIGHT

Product Code

TVL 1072

POWER	DIMENSION (in MM)	CUTOUT (in MM)
8W	Ø120x120x35(H)	Ø100x100
12W	Ø145x145x35(H)	Ø125x125
18W	Ø170x170x35(H)	Ø150x150
24W	Ø195x195x35(H)	Ø175x175

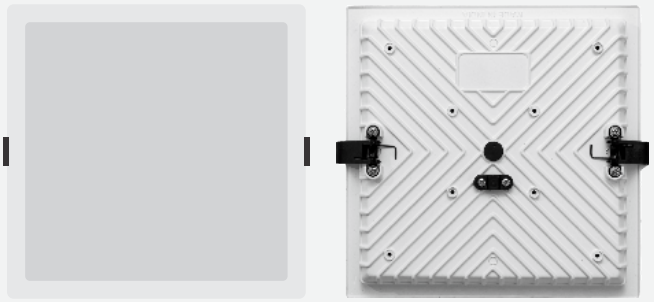


BEAM ANGLE	:	110°
LED COLOR	:	3K/4K/5K/6K / CCT
BODY COLOR	:	WH
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM
REFLECTOR	:	DIFFUSER

LED PANEL LIGHT

Product Code

TVL 1073

POWER	DIMENSION (in MM)	CUTOUT (in MM)
8W	Ø120x35(H)	Ø100
12W	Ø145x35(H)	Ø125
18W	Ø170x35(H)	Ø150
24W	Ø195x35(H)	Ø175

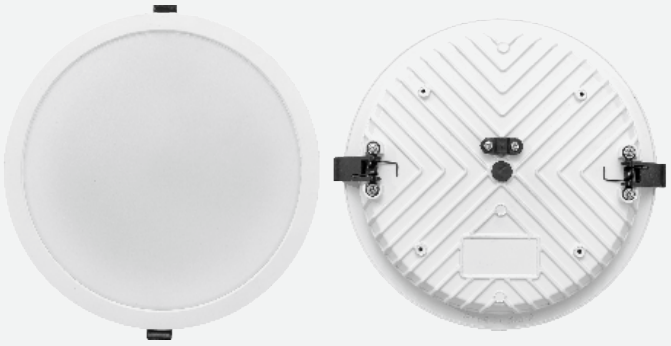

BEAM ANGLE	:	110°
LED COLOR	:	3K/4K/5K/6K / CCT
BODY COLOR	:	WH
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM
REFLECTOR	:	DIFFUSER

LED DOWN LIGHT

Product Code

TVL 1074

POWER	DIMENSION (in MM)	CUTOUT (in MM)
12W	Ø120x50(H)	Ø110
18W	Ø148x50(H)	Ø142
24W	Ø170x50(H)	Ø164



BEAM ANGLE : 110°
LED COLOR : 3K/4K/5K/6K / CCT
BODY COLOR : WH
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : DIFFUSER

LED DOWN LIGHT

Product Code

TVL 1075

POWER	DIMENSION (in MM)	CUTOUT (in MM)
12W	Ø110x110x50(H)	Ø100x100
18W	Ø142x142x50(H)	Ø134x134



BEAM ANGLE : 110°
LED COLOR : 3K/4K/5K/6K
BODY COLOR : WH
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : DIFFUSER

LED DOWN LIGHT

Product Code

TVL 1076

POWER	DIMENSION (in MM)	CUTOUT (in MM)
12W	Ø91x54(H)	Ø83
18W	Ø100x57(H)	Ø92



BEAM ANGLE	:	90°
LED COLOR	:	3K/4K/5K/6K
BODY COLOR	:	WH
IP RATING	:	Ñ
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM
REFLECTOR	:	DIFFUSER

LED DOWN LIGHT

Product Code

TVL 1077

POWER	DIMENSION (in MM)	CUTOUT (in MM)
12W	Ø82x40(H)	Ø75
18W	Ø105x44(H)	Ø95



BEAM ANGLE	:	36°
LED COLOR	Ě	3K/4K/5K/6K / CCT
BODY COLOR	:	WH+WH, WH+GBK
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALU. DIE CASTING
REFLECTOR	:	ALU. ANODIZED

LED DOWN LIGHT

Product Code

TVL 1078

POWER	DIMENSION (in MM)	CUTOUT (in MM)
8W	Ø62x40(H)	Ø55
12W	Ø72x41(H)	Ø65
15W	Ø82x42(H)	Ø75



BEAM ANGLE : 110°
LED COLOR : 3K/4K/5K/6K
BODY COLOR : WH
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : DIFFUSER


CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

LED DOWN LIGHT

Product Code

TVL 1079

POWER	DIMENSION (in MM)	CUTOUT (in MM)
12W	Ø85x45(H)	Ø75
18W	Ø115x45(H)	Ø105
24W	Ø165x46(H)	Ø155
35W	Ø215x49(H)	Ø205
48W	Ø295x52(H)	Ø285

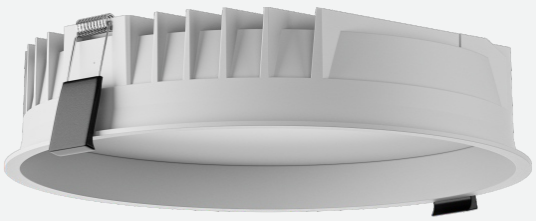

BEAM ANGLE : 110°
LED COLOR : 3K/4K/5K/6K
BODY COLOR : WH, BK
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : Ø
REFLECTOR : DIFFUSER

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

LED DOWN LIGHT

Product Code

TVL 1080

POWER	DIMENSION (in MM)	CUTOUT (in MM)
12W	Ø100x50(H)	Ø90
18W	Ø130x50(H)	Ø120
24W	Ø150x50(H)	Ø140



BEAM ANGLE	:	110°
LED COLOR	:	3K/4K/5K/6K
BODY COLOR	:	WH
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM
REFLECTOR	:	DIFFUSER




LED SURFACE SMD

LED SURFACE SMD

Product Code

TVL 1085

in MM

POWER	DIMENSION
8W	Ø91x28(H)
15W	Ø145x28(H)
22W	Ø170x28(H)



BEAM ANGLE : 110°
LED COLOR : 3K/4K/5K/6K
BODY COLOR : WH
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : DIFFUSER

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

LED SURFACE SMD

Product Code

TVL 1086

in MM

POWER	DIMENSION
8W	Ø91x91x28(H)
15W	Ø145x145x28(H)
22W	Ø170x170x28(H)



BEAM ANGLE : 110°
LED COLOR : 3K/4K/5K/6K
BODY COLOR : WH
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : DIFFUSER

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

LED SURFACE SMD

Product Code

TVL 1087

in MM

POWER	DIMENSION
12W	Ø117x36(H)
18W	Ø170x36(H)
24W	Ø220x30(H)



BEAM ANGLE : 110°
LED COLOR : 3K/4K/5K/6K / CCT
BODY COLOR : WH
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : DIFFUSER

LED SURFACE SMD

Product Code

TVL 1088

in MM

POWER	DIMENSION
12W	Ø117x117x36(H)
18W	Ø170x170x36(H)
24W	Ø220x220x36(H)



BEAM ANGLE : 110°
LED COLOR : 3K/4K/5K/6K / CCT
BODY COLOR : WH
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : DIFFUSER


LED SURFACE SMD

Product Code

TVL 1089

in MM

POWER	DIMENSION
12W	Ø140x50(H)
15W	Ø140x50(H)
18W	Ø140x50(H)
22W	Ø140x50(H)
25W	Ø170x50(H)

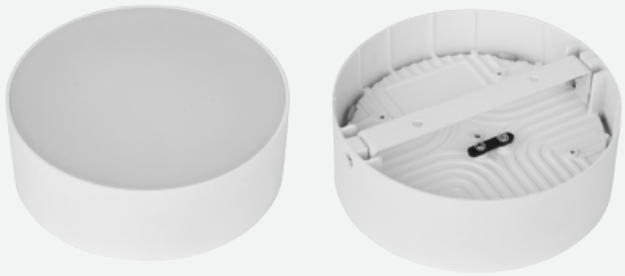

BEAM ANGLE : 110°
LED COLOR : 3K/4K/5K/6K / CCT
BODY COLOR : WH
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : DIFFUSER

LED SURFACE SMD

Product Code

TVL 1090

in MM

POWER	DIMENSION
6W	Ø80x65(H)
12W	Ø90x65(H)
15W	Ø100x60(H)
18W	Ø120x60(H)



BEAM ANGLE : 110°
LED COLOR : 3K/4K/5K/6K / CCT
BODY COLOR : WH
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : DIFFUSER

LED SURFACE SMD

Product Code

TVL 1091

in MM

POWER	DIMENSION
12W	Ø92x65(H)
18W	Ø122x65(H)
24W	Ø142x65(H)



BEAM ANGLE	:	110°
LED COLOR	:	3K/4K/5K/6K / CCT
BODY COLOR	:	WH
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM
REFLECTOR	:	DIFFUSER





LASER BLADE

LED LASER
BLADE LIGHT
Product Code

TVL 1101

POWER	DIMENSION (in MM)	CUTOUT (in MM)
10W	Ø108x32x40(H)	Ø102x26



BEAM ANGLE : 30°
LED COLOR : 3K/4K
BODY COLOR : WH+BK
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED + LENS

LED LASER
BLADE LIGHT
Product Code

TVL 1101

POWER	DIMENSION (in MM)	CUTOUT (in MM)
20W	Ø204x32x40(H)	Ø198x26



BEAM ANGLE : 30°
LED COLOR : 3K/4K
BODY COLOR : WH+BK
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED + LENS

LED LASER
BLADE LIGHT
Product Code

TVL 1101

POWER	DIMENSION (in MM)	CUTOUT (in MM)
8W	Ø52x52x40(H)	Ø45x45



BEAM ANGLE : 30°
LED COLOR : 3K/4K
BODY COLOR : WH+BK
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED + LENS

LED LASER
BLADE LIGHT
Product Code

TVL 1101

POWER	DIMENSION (in MM)	CUTOUT (in MM)
16W	Ø71x71x40(H)	Ø65x65



BEAM ANGLE : 30°
LED COLOR : 3K/4K
BODY COLOR : WH+BK
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED + LENS

LED LASER
BLADE LIGHT
Product Code

TVL 1102

POWER	DIMENSION (in MM)	CUTOUT (in MM)
5x2W	Ø149x45x43(H)	Ø136x33



BEAM ANGLE	:	45°
LED COLOR	:	3K/4K
BODY COLOR	:	WH+BK
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM
REFLECTOR	:	ALU. ANODIZED

LED LASER
BLADE LIGHT
Product Code

TVL 1102

POWER	DIMENSION (in MM)	CUTOUT (in MM)
10x2W	Ø280x45x43(H)	Ø271x34



BEAM ANGLE	:	45°
LED COLOR	:	3K/4K
BODY COLOR	:	WH+BK
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM
REFLECTOR	:	ALU. ANODIZED

LED LASER
BLADE LIGHT
Product Code

TVL 1103

POWER	DIMENSION (in MM)	CUTOUT (in MM)
6W	Ø92x53x43(H)	Ø70x31
12W	Ø132x53x43(H)	Ø108x29




BEAM ANGLE	:	30°
LED COLOR	:	3K/4K
BODY COLOR	:	WH, BK
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM
REFLECTOR	:	ALU. ANODIZED

LED LASER
BLADE LIGHT
Product Code

TVL 1104

POWER	DIMENSION (in MM)	CUTOUT (in MM)
3x2W	Ø82x35x55(H)	Ø72x25
5x2W	Ø128x35x55(H)	Ø120x25
10x2W	Ø245x35x55(H)	Ø223x25

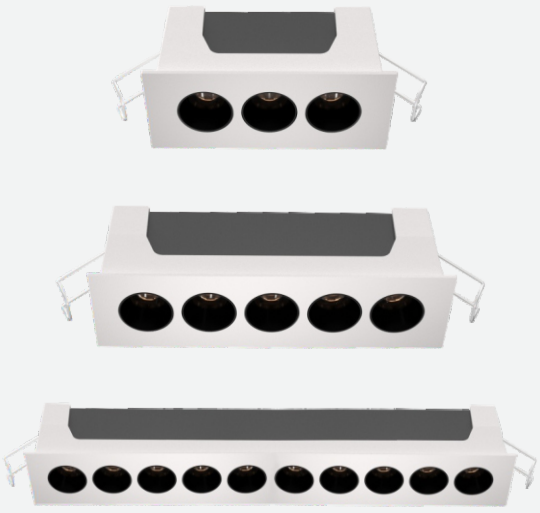

BEAM ANGLE	:	24°
LED COLOR	:	3K/4K
BODY COLOR	:	WH, BK
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	Ø
REFLECTOR	:	ALU. ANODIZED

LED LASER
BLADE LIGHT
Product Code

TVL 1105



POWER	DIMENSION (in MM)	CUTOUT (in MM)
5W	Ø52x52x56(H)	Ø42x42
12W	Ø128x52x56(H)	Ø120x42
18W	Ø90x90x56(H)	Ø80x80
24W	Ø205x52x56(H)	Ø195x52

BEAM ANGLE	:	38°
LED COLOR	:	3K/4K/5K/6K
BODY COLOR	:	WH, BK
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM
REFLECTOR	:	ALU. ANODIZED





LED TRACK LIGHT

LED TRACK LIGHT

Product Code

TVL 1201

in MM

POWER	DIMENSION
10W	Ø50x135(H)
15W	Ø60x150(H)
20W	Ø60x150(H)
30W	Ø80x180(H)
40W	Ø80x195(H)



BEAM ANGLE : 24°/36°/60°
LED COLOR : 3K/4K/5K/6K
BODY COLOR : WH, BK
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : LENS

LED TRACK LIGHT

Product Code

TVL 1202

in MM

POWER	DIMENSION
25W	Ø80x180(H)
30W	Ø80x180(H)



BEAM ANGLE : 36°
LED COLOR : 3K/4K/5K/6K
BODY COLOR : WH, BK
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED

LED TRACK LIGHT

Product Code

TVL 1203



POWER
12W
20W
30W

BEAM ANGLE	:	24°
LED COLOR	:	3K/4K/5K/6K / CCT
BODY COLOR	:	WH, BK
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM
REFLECTOR	:	LENS

LED TRACK LIGHT

Product Code

TVL 1204



POWER
12W
18W

BEAM ANGLE	:	24°
LED COLOR	:	3K/4K/5K/6K / CCT
BODY COLOR	:	WH+BK, BK+BK
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM
REFLECTOR	:	ALU. ANODIZED

LED TRACK LIGHT

Product Code

TVL 1205

POWER
15W
20W



BEAM ANGLE	:	24°
LED COLOR	:	3K/4K/5K/6K
BODY COLOR	:	WH+BK, WH+COP
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM
REFLECTOR	:	ALU. ANODIZED

LED TRACK LIGHT

Product Code

TVL 1208

POWER
20W
25W
35W



BEAM ANGLE	:	36°
LED COLOR	:	3K/4K/5K/6K
BODY COLOR	:	WH, BK
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM
REFLECTOR	:	ALU. ANODIZED

LED TRACK LIGHT

Product Code

TVL 1209

POWER
15W
20W



BEAM ANGLE	:	36°
LED COLOR	:	3K/4K/5K/6K
BODY COLOR	:	WH, BK
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM
REFLECTOR	:	ALU. ANODIZED

LED TRACK LIGHT

Product Code

TVL 1210

POWER
25W
30W
40W



BEAM ANGLE	:	36°
LED COLOR	:	3K/4K/5K/6K
BODY COLOR	:	WH, BK
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM
REFLECTOR	:	ALU. ANODIZED

LED TRACK LIGHT

Product Code

TVL 1211

in MM

POWER	DIMENSION
10W	Ø80x90(H)
12W	Ø80x90(H)
15W	Ø80x90(H)



BEAM ANGLE : 24°
LED COLOR : 3K/4K/5K/6K
BODY COLOR : WH, BK
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM

LED TRACK LIGHT

Product Code

TVL 1212

POWER
32W
36W
42W



BEAM ANGLE : 15°/24°/40°/60°
LED COLOR : 3K/4K/5K/6K
BODY COLOR : WH, BK
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED

TRACK PATTI

Product Code

TVL 1213

LENGTH

1 MTR
2 MTR







MAGNETIC TRACK LIGHT


mm MAGNETIC TRACK LIGHT

Product Code


TVL 1111

in MM

LENGTH	DIMENSION
1 MTR	Ø1000
2 MTR	Ø2000
3 MTR	Ø3000

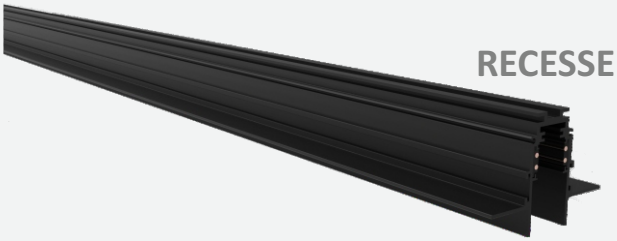

RECESSED

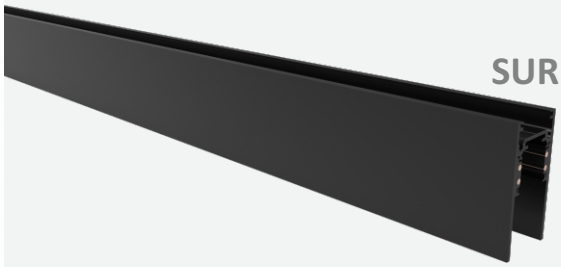

SURFACE

BODY COLOR : BK


MATERIAL : ALUMINIUM

:

mm MAGNETIC TRACK LIGHT

Product Code

TVL 1112



RC CORNER-90°

DIMENSION

Ø100x100 in MM

BODY COLOR : BK

MATERIAL : ALUMINIUM



SF CORNER-90°

DIMENSION

Ø74x74 in MM

BODY COLOR : BK

MATERIAL : ALUMINIUM

mm MAGNETIC TRACK LIGHT

Product Code

TVL 1113



DRIVER - INPUT MODULE

DIMENSION

Ø17x16x98 in MM

BODY COLOR : BK

MATERIAL : ALUMINIUM



DRIVER - CORNER MODULE

DIMENSION

Ø17x16x98 in MM

BODY COLOR : BK

MATERIAL : ALUMINIUM

mm MAGNETIC
TRACK LIGHT
Product Code

TVL 1114

in MM

POWER	DIMENSION
6W	Ø112x22x110(H)



BEAM ANGLE : 24°
LED COLOR : 3K/4K / CCT
BODY COLOR : BK
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED + LENS

mm MAGNETIC
TRACK LIGHT
Product Code

TVL 1114

in MM

POWER	DIMENSION
12W	Ø220x22x110(H)



BEAM ANGLE : 24°
LED COLOR : 3K/4K / CCT
BODY COLOR : BK
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED + LENS


mm MAGNETIC TRACK LIGHT

Product Code

TVL 1115

in MM

POWER	DIMENSION
12W	Ø220x22x110(H)

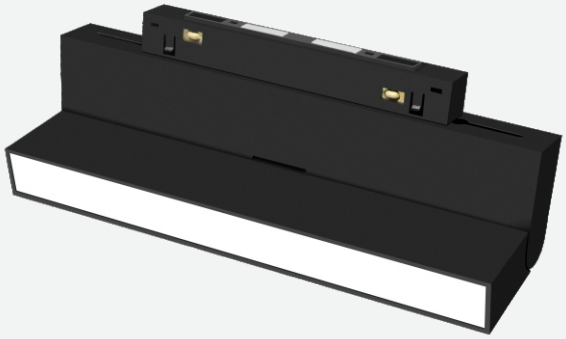

BEAM ANGLE	:	120°
LED COLOR	:	3K/4K
BODY COLOR	:	BK
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM
REFLECTOR	:	DIFFUSER

mm MAGNETIC TRACK LIGHT

Product Code

TVL 1116

in MM

POWER	DIMENSION
10W	Ø300x22x25(H)




BEAM ANGLE	:	120°
LED COLOR	:	3K/4K / CCT
BODY COLOR	:	BK
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM
REFLECTOR	:	DIFFUSER

mm MAGNETIC
TRACK LIGHT
Product Code

TVL 1116

in MM

POWER	DIMENSION
20W	Ø600x22x50(H)

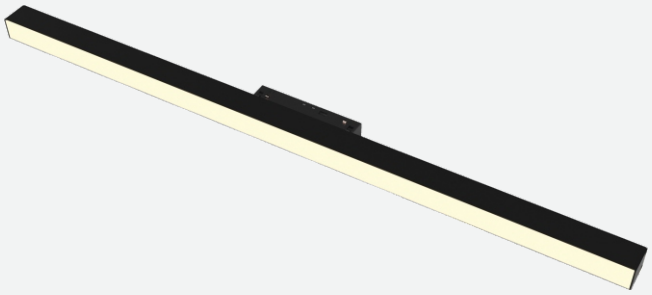

BEAM ANGLE	:	120°
LED COLOR	:	3K/4K / CCT
BODY COLOR	:	BK
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM
REFLECTOR	:	DIFFUSER

mm MAGNETIC
TRACK LIGHT
Product Code

TVL 1117

in MM

POWER	DIMENSION
6x1W	Ø113x22x25(H)



BEAM ANGLE	:	24°
LED COLOR	:	3K/4K / CCT
BODY COLOR	:	BK
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM
REFLECTOR	:	ALU. ANODIZED + LENS

mm MAGNETIC TRACK LIGHT

Product Code

TVL 1117

in MM

POWER	DIMENSION
12x1W	Ø220x22x50(H)
18x1W	Ø230x22x50(H)



BEAM ANGLE : 24°
LED COLOR : 3K/4K / CCT
BODY COLOR : BK
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED + LENS

mm MAGNETIC TRACK LIGHT

Product Code

TVL 1118

in MM

POWER	DIMENSION
3W	Ø26x87(H)
6W	Ø36x100(H)
12W	Ø48x125(H)
20W	Ø58x175(H)



BEAM ANGLE : 24°
LED COLOR : 3K/4K
BODY COLOR : BK
IP RATING : IP20
CRI : >80 (>90 On Request)
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED

mm MAGNETIC
TRACK LIGHT

Product Code

TVL 1119

in MM

POWER	DIMENSION
6W	Ø30x300(H)
12W	Ø60x300(H)



BEAM ANGLE	:	15°
LED COLOR	:	3K/4K
BODY COLOR	:	BK
IP RATING	:	IP20
CRI	:	>80 (>90 On Request)
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM
REFLECTOR	:	ALU. ANODIZED



LED STRIP LIGHT



12V DC

SPECIFICATION
2835-120 LED 5MM
2835-120 LED 8MM
2835-180 LED 10MM
2835-240 LED 10MM

24V DC

SPECIFICATION
2835-120 LED 5MM
2835-120 LED 8MM
2835-180 LED 10MM
2835-240 LED 10MM

LED DRIVER



12V DC

SPECIFICATION
12V - 2 AMP - 24W
12V - 3 AMP - 36W
12V - 5 AMP - 60W
12V - 10 AMP - 120W
12V - 12.5 AMP - 150W
12V - 15 AMP - 180W
12V - 20 AMP - 240W
12V - 24 AMP - 288W



24V DC

SPECIFICATION
24V - 2.5 AMP - 60W
24V - 4.25 AMP - 100W
24V - 6.25 AMP - 150W
24V - 8.3 AMP - 200W



48V DC

SPECIFICATION
48V - 100W
48V - 150W
48V - 200W



20MM - 48V MAGNETIC DC

SPECIFICATION
48V - 100W
48V - 150W
48V - 200W


LED BOLLARD LIGHT

LED BOLLARD LIGHT

Product Code

TVL 2110

in MM

POWER	DIMENSION
12W	Ø105x105x250(H)
12W	Ø105x105x500(H)
12W	Ø105x105x760(H)



BEAM ANGLE	:	44°
LED COLOR	:	3K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM

LED BOLLARD LIGHT

Product Code

TVL 2111

in MM

POWER	DIMENSION
12W	Ø130x250(H)
12W	Ø130x500(H)
12W	Ø130x760(H)



BEAM ANGLE	:	175°
LED COLOR	:	3K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM

LED BOLLARD LIGHT

Product Code

TVL 2112

in MM

POWER	DIMENSION
12W	Ø180x250(H)
12W	Ø180x500(H)
12W	Ø180x1000(H)



BEAM ANGLE	:	360°
LED COLOR	:	3K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM
	:	

LED BOLLARD LIGHT

Product Code

TVL 2113

in MM

POWER	DIMENSION
6W	Ø150x250(H)
6W	Ø150x500(H)
6W	Ø150x760(H)



BEAM ANGLE	:	117°
LED COLOR	:	3K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM
	:	

LED BOLLARD LIGHT

Product Code

TVL 2114

in MM

POWER	DIMENSION
12W	Ø250x250(H)
12W	Ø250x500(H)
12W	Ø250x760(H)



BEAM ANGLE : 117°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >80
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM

LED BOLLARD LIGHT

Product Code

TVL 2115

in MM

POWER	DIMENSION
12W	Ø160x250(H)
12W	Ø160x500(H)
12W	Ø160x760(H)



BEAM ANGLE : 92°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >80
DRIVER : b,a,g,
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM

LED BOLLARD LIGHT

Product Code

TVL 2116



in MM

POWER	DIMENSION
12W	Ø105x250(H)
12W	Ø105x500(H)
12W	Ø105x760(H)

BEAM ANGLE	:	360°
LED COLOR	:	3K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM

LED BOLLARD LIGHT

Product Code

TVL 2117



in MM

POWER	DIMENSION
12W	Ø122x250(H)
12W	Ø122x500(H)
12W	Ø122x760(H)

BEAM ANGLE	:	360°
LED COLOR	:	3K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM

LED BOLLARD LIGHT

Product Code

TVL 2118

in MM

POWER	DIMENSION
E27 HOLDER	Ø215x500(H)
E27 HOLDER	Ø215x760(H)



BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >80

LED BOLLARD LIGHT

Product Code

TVL 2119

in MM

POWER	DIMENSION
E27 HOLDER	Ø210x500(H)
E27 HOLDER	Ø210x750(H)



BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >80

LED BOLLARD LIGHT

Product Code

TVL 2120

in MM


POWER	DIMENSION
2xE27 HOLDER	Ø275x380(H)
2xE27 HOLDER	Ø275x685(H)
2xE27 HOLDER	Ø275x990(H)



BODY COLOR : DARK GREY

IP RATING : IP54

CRI : >80

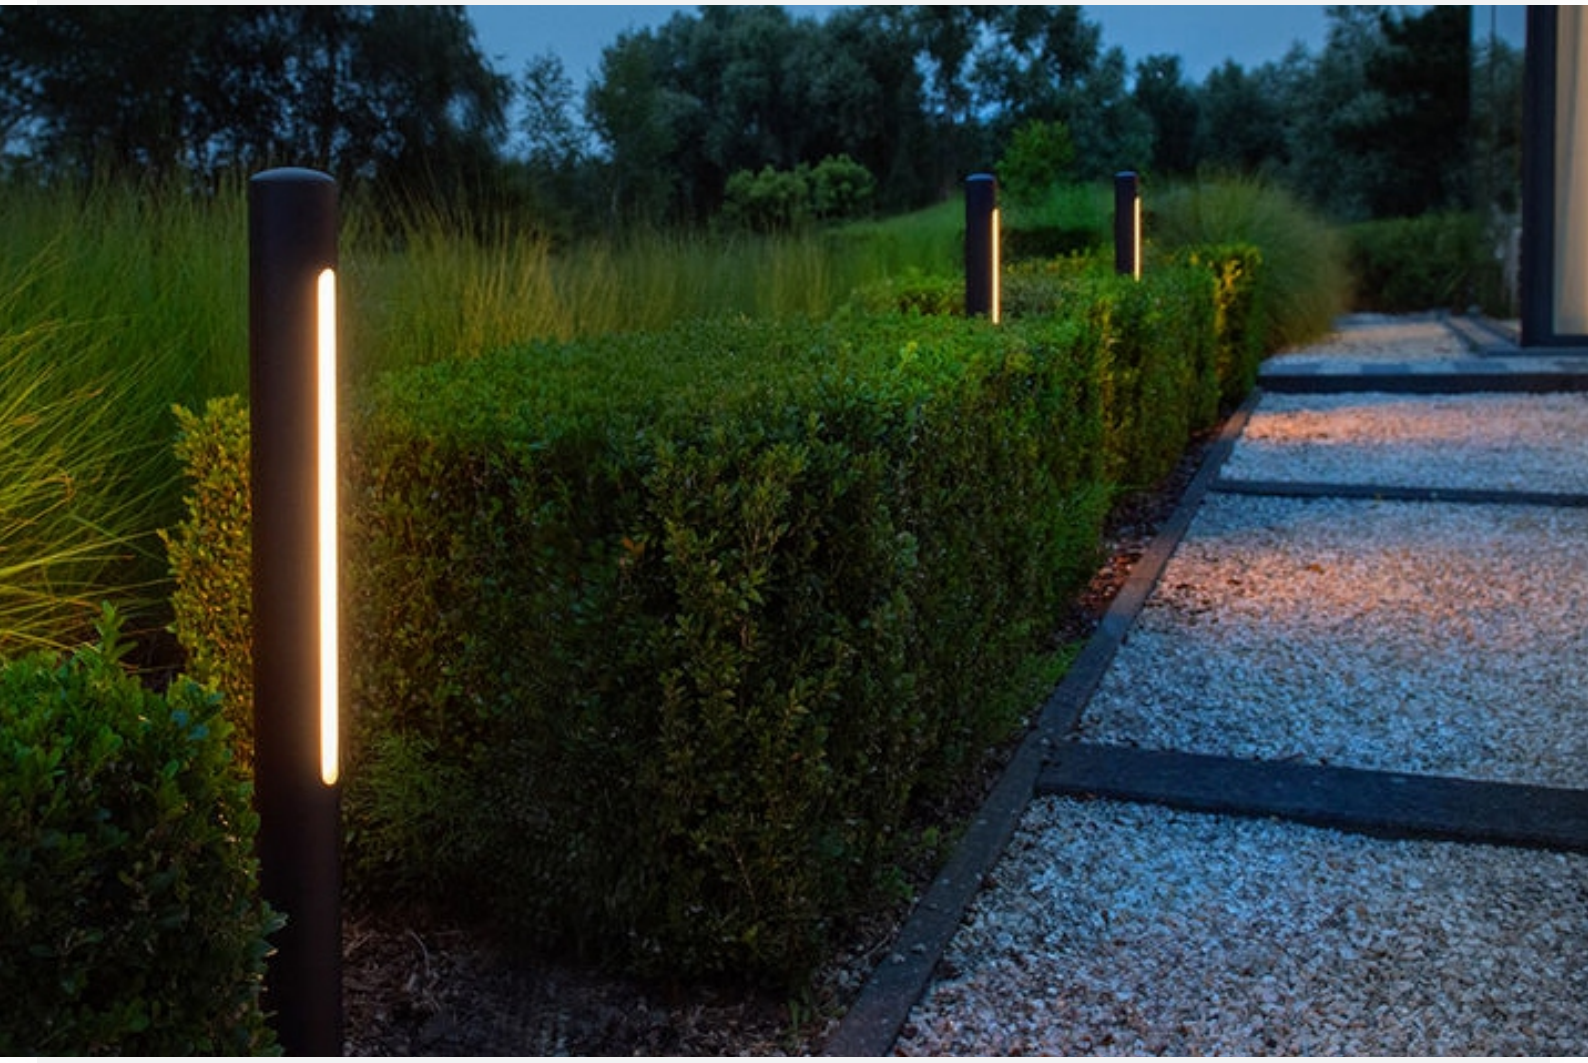


LED WALL LIGHT

LED WALL LIGHT

Product Code

TVL 2126

in MM

POWER	DIMENSION
12W	Ø180x45(H)



BEAM ANGLE	:	360°
LED COLOR	:	3K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

LED WALL LIGHT

Product Code

TVL 2127

in MM

POWER	DIMENSION
12W	Ø180x250(H)



BEAM ANGLE	:	360°
LED COLOR	:	3K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
DRIVER	:	b,a,g,
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

LED WALL LIGHT

Product Code

TVL 2128

in MM

POWER	DIMENSION
E27 HOLDER	Ø215x200(H)



LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >80

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

LED WALL LIGHT

Product Code

TVL 2129

in MM

POWER	DIMENSION
E27 HOLDER	Ø215x200(H)



LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >80

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

LED WALL LIGHT

Product Code

TVL 2130

in MM

POWER	DIMENSION
E27 HOLDER	Ø210x205(H)



LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >80

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers


LED WALL LIGHT

Product Code

TVL 2131

in MM

POWER	DIMENSION
E27 HOLDER	Ø210x205(H)

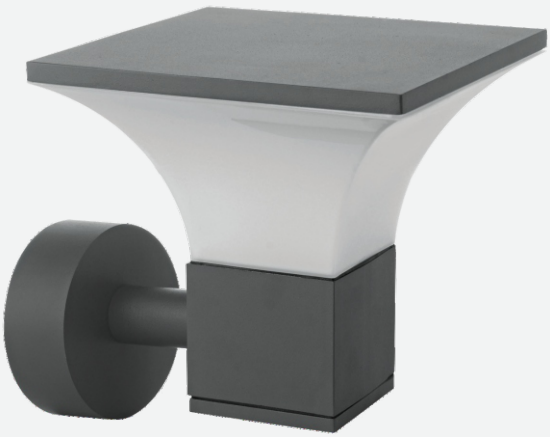

LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >80

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers


LED WALL LIGHT

Product Code

TVL 2132

in MM

POWER	DIMENSION
12W	Ø150x150x152(H)
15W	Ø254x254x254(H)

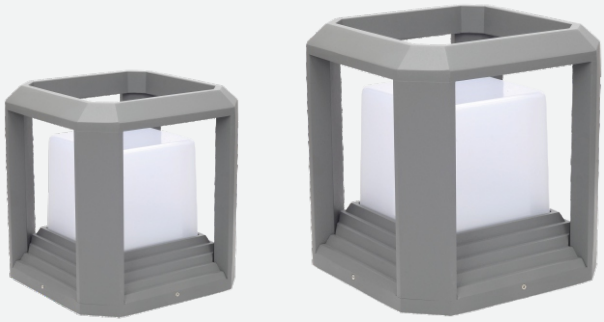

LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >80

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

LED WALL LIGHT

Product Code

TVL 2133

in MM

POWER	DIMENSION
3W	Ø80x75(H)



BEAM ANGLE : 86°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >80
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

LED WALL LIGHT

Product Code

TVL 2134

in MM

POWER	DIMENSION
3W	Ø81x143(H)



BEAM ANGLE	:	86°
LED COLOR	:	3K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

LED WALL LIGHT

Product Code

TVL 2135

in MM

POWER	DIMENSION
1x5W	Ø63x63x79(H)



BEAM ANGLE	:	36°
LED COLOR	:	3K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

LED WALL LIGHT

Product Code

TVL 2136

in MM

POWER	DIMENSION
2x5W	Ø63x63x135(H)



BEAM ANGLE : 36°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >80
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM

LED WALL LIGHT

Product Code

TVL 2137

in MM

POWER	DIMENSION
1x5W	Ø64x82(H)



BEAM ANGLE : 38°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >80
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM

LED WALL LIGHT

Product Code

TVL 2138

in MM

POWER	DIMENSION
2x5W	Ø64x158(H)



BEAM ANGLE	:	38°
LED COLOR	:	3K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

LED WALL LIGHT

Product Code

TVL 2139

in MM

POWER	DIMENSION
1x12W	Ø90x155(H)



BEAM ANGLE	:	38°
LED COLOR	:	3K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

LED WALL LIGHT

Product Code

TVL 2140

in MM

POWER	DIMENSION
2x12W	Ø90x255(H)



BEAM ANGLE	:	38°
LED COLOR	:	3K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

LED WALL LIGHT

Product Code

TVL 2141

in MM

POWER	DIMENSION
50W	Ø88x132x133(H)



BEAM ANGLE	:	38°
LED COLOR	:	3K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

LED WALL LIGHT

Product Code

TVL 2142

in MM

POWER	DIMENSION
2x50W	Ø130x180x245(H)



BEAM ANGLE : 38°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >80
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers


LED WALL LIGHT

Product Code

TVL 2143

in MM

POWER	DIMENSION
2x3W	Ø60x43x120(H)

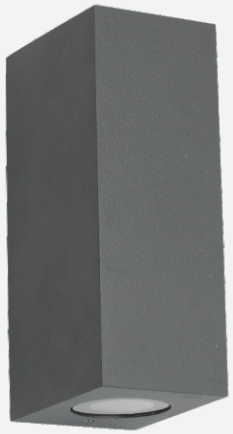

BEAM ANGLE : 36°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >80
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers


LED WALL LIGHT

Product Code

TVL 2144

in MM

POWER	DIMENSION
2x3W	Ø40x60x120(H)

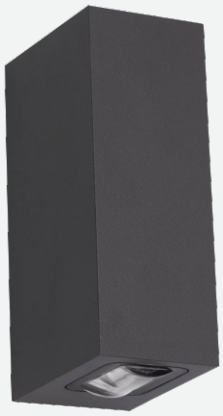

BEAM ANGLE : 6°
LED COLOR : 3K
BODY COLOR : Ø
IP RATING : IP54
CRI : >80
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

LED WALL LIGHT

Product Code

TVL 2145

in MM

POWER	DIMENSION
2x6W	Ø115x90(H)
2x8W	Ø175x28x90(H)





BEAM ANGLE : 120°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >80
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

LED WALL LIGHT

Product Code

TVL 2146

in MM

POWER	DIMENSION
4x1W	Ø60X43x120(H)
6x1W	Ø60X43x120(H)



BEAM ANGLE : 30°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >80
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

LED WALL LIGHT

Product Code

TVL 2147

in MM

POWER	DIMENSION
4x3W	Ø100x100(H)



BEAM ANGLE : 30°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >80
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers


LED WALL LIGHT

Product Code

TVL 2148

in MM

POWER	DIMENSION
4x3W	Ø100x100(H)

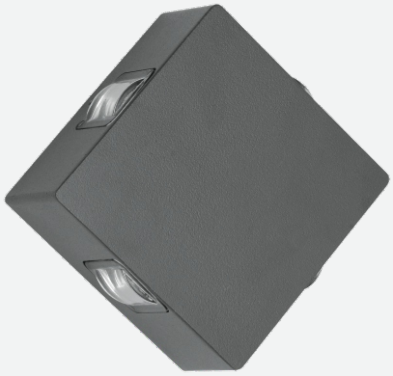

BEAM ANGLE	:	11°
LED COLOR	:	3K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

LED WALL LIGHT

Product Code

TVL 2149

in MM

POWER	DIMENSION
6W	Ø100x100(H)



BEAM ANGLE	:	115°
LED COLOR	:	3K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

LED WALL LIGHT

Product Code

TVL 2150

in MM

POWER	DIMENSION
3x3W	Ø200(H)



BEAM ANGLE	:	11°
LED COLOR	:	3K
BODY COLOR	:	DARK GREY
IP RATING	:	IP
CRI	:	>80
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

LED WALL LIGHT

Product Code

TVL 2151

in MM

POWER	DIMENSION
2x3W	Ø70x70x52(H)



BEAM ANGLE	:	85°
LED COLOR	:	3K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

LED WALL LIGHT

Product Code

TVL 2152

in MM

POWER	DIMENSION
4x3W	Ø70x70x52(H)



BEAM ANGLE	:	85°
LED COLOR	:	3K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

LED WALL LIGHT

Product Code

TVL 2153

in MM

POWER	DIMENSION
4x3W	Ø100x100(H)



BEAM ANGLE	:	85°
LED COLOR	:	3K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

LED WALL LIGHT

Product Code

TVL 2155

in MM

POWER	DIMENSION
2x3W	Ø80x78(H)
4x3W	Ø115x78(H)
6x3W	Ø170x78(H)



BEAM ANGLE : 85°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >80
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM

LED WALL LIGHT

Product Code

TVL 2156

in MM

POWER	DIMENSION
5W	Ø64x97x85(H)



BEAM ANGLE : 40°
LED COLOR : 3K
BODY COLOR : GREY
IP RATING : IP54
CRI : >80
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM

LED WALL LIGHT

Product Code

TVL 2157

in MM

POWER	DIMENSION
2x5W	Ø64x97x100(H)



BEAM ANGLE	:	40°
LED COLOR	:	3K
BODY COLOR	:	GREY
IP RATING	:	IP54
CRI	:	>80
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

LED WALL LIGHT

Product Code

TVL 2158

in MM

POWER	DIMENSION
9W	Ø118x158(H)



BEAM ANGLE	:	17°
LED COLOR	:	3K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers


LED WALL LIGHT

Product Code

TVL 2159

in MM

POWER	DIMENSION
6W	Ø153x96(H)

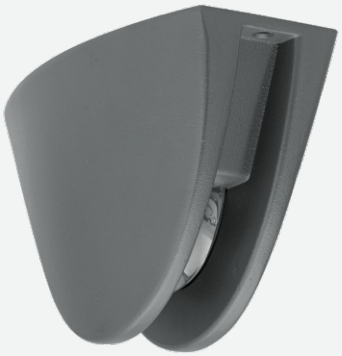

BEAM ANGLE : 17°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >80
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM


LED WALL LIGHT

Product Code

TVL 2160

in MM

POWER	DIMENSION
4W	Ø93x71(H)
8W	Ø150x70(H)





BEAM ANGLE : 98°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >80
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM

LED WALL LIGHT

Product Code

TVL 2161

in MM

POWER	DIMENSION
9W	Ø160x20(H)



BEAM ANGLE : 77°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >80
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM

LED WALL LIGHT

Product Code

TVL 2162

in MM

POWER	DIMENSION
9W	Ø160x160x25(H)



BEAM ANGLE : 77°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >80
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM

LED WALL LIGHT

Product Code

TVL 2163

in MM

POWER	DIMENSION
6W	Ø80x233(H)



BEAM ANGLE	:	120°
LED COLOR	:	3K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM

LED WALL LIGHT

Product Code

TVL 2164

in MM

POWER	DIMENSION
8W	Ø80x233(H)



BEAM ANGLE	:	120°
LED COLOR	:	3K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM

LED WALL LIGHT

Product Code

TVL 2165

in MM

POWER	DIMENSION
10W	Ø65x64x175(H)



BEAM ANGLE : 120°
LED COLOR : 3K
BODY COLOR : BK
IP RATING : IP54
CRI : >80
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

LED WALL LIGHT

Product Code

TVL 2166

in MM

POWER	DIMENSION
10W	Ø81x65x212(H)



BEAM ANGLE : 77°
LED COLOR : 3K
BODY COLOR : GREY
IP RATING : IP54
CRI : >80
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers


RECESSED FOOT LIGHT


RECESSED FOOT LIGHT

Product Code

TVL 2176

in MM

POWER	DIMENSION
3W	Ø96x60(H)

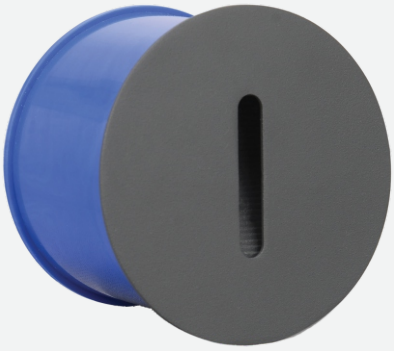

BEAM ANGLE	:	10°
LED COLOR	:	3K
BODY COLOR	:	GRAPHITE GREY
IP RATING	:	IP54
CRI	:	>80
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM

RECESSED FOOT LIGHT

Product Code

TVL 2177

in MM

POWER	DIMENSION
3W	Ø96x96x60(H)



BEAM ANGLE	:	10°
LED COLOR	:	3K
BODY COLOR	:	GRAPHITE GREY
IP RATING	:	IP54
CRI	:	>80
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM

RECESSED FOOT LIGHT

Product Code

TVL 2178

in MM

POWER	DIMENSION
3W	Ø84x84x45(H)



BEAM ANGLE : 75°
LED COLOR : 3K
BODY COLOR : GRAPHITE GREY
IP RATING : IP54
CRI : >80
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM

RECESSED FOOT LIGHT

Product Code

TVL 2179

in MM

POWER	DIMENSION
6W	Ø135x80x75(H)



BEAM ANGLE : 33°
LED COLOR : 3K
BODY COLOR : GRAPHITE GREY
IP RATING : IP54
CRI : >80
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM


RECESSED FOOT LIGHT

Product Code

TVL 2180

in MM

POWER	DIMENSION
3W	Ø48x63(H)

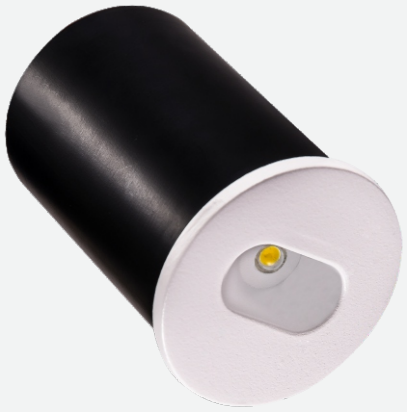

BEAM ANGLE	:	60°
LED COLOR	:	3K
BODY COLOR	:	WH
IP RATING	:	IP54
CRI	:	>80
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers


RECESSED FOOT LIGHT

Product Code

TVL 2181

in MM

POWER	DIMENSION
3W	Ø46x46x80(H)

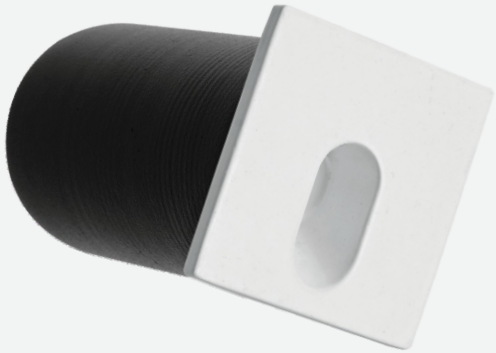

BEAM ANGLE	:	60°
LED COLOR	:	3K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

RECESSED FOOT LIGHT

Product Code

TVL 2182

in MM

POWER	DIMENSION
3W	Ø60x65(H)



BEAM ANGLE	:	110°
LED COLOR	:	3K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM

RECESSED FOOT LIGHT

Product Code

TVL 2183

in MM

POWER	DIMENSION
3W	Ø50x80(H)



BEAM ANGLE	:	110°
LED COLOR	:	3K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM


RECESSED FOOT LIGHT

Product Code

TVL 2184

in MM

POWER	DIMENSION
3W	Ø198x47x198(H)



BEAM ANGLE	:	31°
LED COLOR	:	3K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM





POLE LIGHT

LED POLE LIGHT



TVL 2189

POWER	:	50W | 100W
LED COLOR	:	3K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
DIMENSION	:	Ø3000(H)MM
MATERIAL	:	ALUMINIUM



TVL 2190

POWER	:	30W
LED COLOR	:	3K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
DIMENSION	:	Ø3000(H)MM
MATERIAL	:	ALUMINIUM



TVL 2191

POWER	:	50W | 100W
LED COLOR	:	3K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
DIMENSION	:	Ø3000(H)MM
MATERIAL	:	ALUMINIUM

LED POLE LIGHT





TVL 2192

POWER	:	30 | 45 | 75 | 100 | 150W
LED COLOR	:	3K/4K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
LENGTH	:	CUSTOMIZED
PIPE DIA	:	AS PER REQUEST (75MM/100MM)

TVL 2193


POWER	:	30 | 45 | 75 | 100 | 150W
LED COLOR	:	3K/4K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
LENGTH	:	CUSTOMIZED
PIPE DIA	:	100x100MM

LED POLE LIGHT



TVL 2194

POWER	:	30|45|75|100|150W
LED COLOR	:	3K/4K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
LENGTH	:	CUSTOMIZED
PIPE DIA	:	AS PER REQUEST (75MM/100MM)

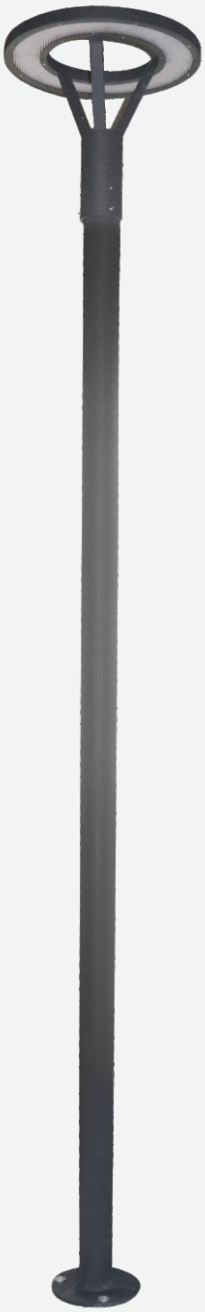

TVL 2195


POWER	:	30|45|75|100|150W
LED COLOR	:	3K/4K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
LENGTH	:	CUSTOMIZED
PIPE DIA	:	AS PER REQUEST (75MM/100MM)



TVL 2196

POWER	:	30|45|75|100|150W
LED COLOR	:	3K/4K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
LENGTH	:	CUSTOMIZED
PIPE DIA	:	AS PER REQUEST (75MM/100MM)

LED POLE LIGHT

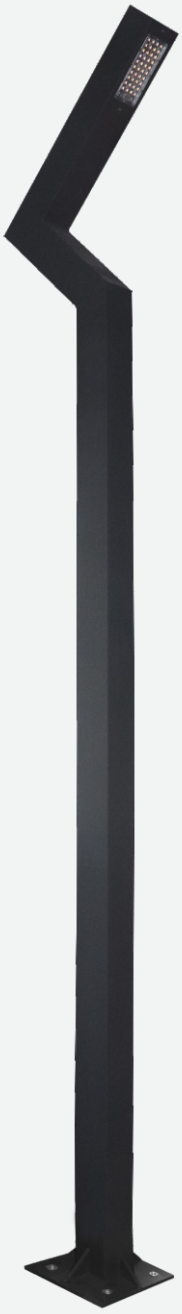



TVL 2197

POWER	:	30 | 45 | 75 | 100 | 150W
LED COLOR	:	3K/4K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
LENGTH	:	CUSTOMIZED
PIPE DIA	:	100x100MM

TVL 2198

POWER	:	30 | 45 | 75 | 100 | 150W
LED COLOR	:	3K/4K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
LENGTH	:	CUSTOMIZED
PIPE DIA	:	75x75MM



LED SPIKE LIGHT

LED SPIKE LIGHT

Product Code

TVL 2210

in MM

POWER	DIMENSION
7W	Ø64x91x186(H)
12W	Ø85x95x186(H)



BEAM ANGLE : 38°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >80
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM

LED SPIKE LIGHT

Product Code

TVL 2211

in MM

POWER	DIMENSION
7W	Ø64x110x186(H)
12W	Ø85x110x186(H)



BEAM ANGLE : 38°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >80
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM

LED SPIKE LIGHT

Product Code

TVL 2212

in MM

POWER	DIMENSION
7W	Ø64x110(H)
12W	Ø85x110(H)



BEAM ANGLE : 38°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >80
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM

LED SPIKE LIGHT

Product Code

TVL 2213

POWER
7W



BEAM ANGLE : 38°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >80
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM

LED SPIKE LIGHT

Product Code

TVL 2214



in MM

POWER	DIMENSION
3W	Ø45x66(H)
7W	Ø66x100(H)
12W	Ø66x100(H)
Max 20W	Ø66x130(H)

BEAM ANGLE	:	38°
LED COLOR	:	3K
BODY COLOR	:	GREY
IP RATING	:	IP54
CRI	:	>80
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM



LED SPIKE LIGHT

Product Code

TVL 2215

in MM

POWER	DIMENSION
12W	Ø60x110(H)



BEAM ANGLE : 24°
LED COLOR : 3K
BODY COLOR : BK
IP RATING : IP54
CRI : >80
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM

LED SPIKE LIGHT

Product Code

TVL 2216

in MM

POWER	DIMENSION
12W	Ø45x90(H)



BEAM ANGLE : 24°
LED COLOR : 3K
BODY COLOR : BK
IP RATING : IP54
CRI : >80
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM



PILLAR HIGHLIGHTER

PILLAR HIGH LIGHTER

Product Code

TVL 2311

in MM

POWER	DIMENSION
15W	Ø68x101(H)



BEAM ANGLE	:	10°
LED COLOR	:	3K
BODY COLOR	:	GREY
IP RATING	:	IP65
CRI	:	>80
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

PILLAR HIGH LIGHTER

Product Code

TVL 2312

in MM

POWER	DIMENSION
8W	Ø65x65x115(H)



BEAM ANGLE	:	30°
LED COLOR	:	3K
BODY COLOR	:	GREY
IP RATING	:	IP65
CRI	:	>80
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers



LED CEILING LIGHT

LED CEILING LIGHT

Product Code

TVL 2220

in MM

POWER	DIMENSION
3W	Ø58x14(H)



BEAM ANGLE	:	120°
LED COLOR	:	3K
BODY COLOR	:	BK
IP RATING	:	IP54
CRI	:	>80
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

LED CEILING LIGHT

Product Code

TVL 2221

POWER
GU 10



BODY COLOR	:	GREY
IP RATING	:	IP54
MATERIAL	:	ALUMINIUM

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers


LED CEILING LIGHT

Product Code

TVL 2222

in MM

POWER	DIMENSION
1x5W	Ø63x79(H)

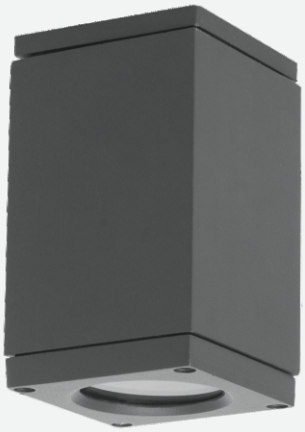

BEAM ANGLE	:	36°
LED COLOR	:	3K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

LED CEILING LIGHT

Product Code

TVL 2223

in MM

POWER	DIMENSION
5W	Ø64x82(H)



BEAM ANGLE	:	36°
LED COLOR	:	3K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

LED CEILING LIGHT

Product Code

TVL 2224

in MM

POWER	DIMENSION
50W	Ø130x250(H)



BEAM ANGLE	:	36°
LED COLOR	:	3K/4K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM

LED CEILING LIGHT

Product Code

TVL 2225

in MM

POWER	DIMENSION
12W	Ø90x130(H)



BEAM ANGLE	:	36°
LED COLOR	:	3K
BODY COLOR	:	DARK GREY
IP RATING	:	IP54
CRI	:	>80
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM



INGROUND LIGHT

INGROUND &
PATH WASHER
Product Code

TVL 2229



POWER	DIMENSION (in MM)	CUTOUT (in MM)
1x2W	Ø84x90(H)	Ø68
2x1W	Ø84x90(H)	Ø68
4x1W	Ø84x90(H)	Ø68

BEAM ANGLE : 105°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >80
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM

INGROUND &
PATH WASHER
Product Code

TVL 2230

POWER	DIMENSION (in MM)	CUTOUT (in MM)
3W	Ø43x70(H)	Ø34



BEAM ANGLE : 45°
LED COLOR : 3K
BODY COLOR : SS FINISH
IP RATING : IP65
CRI : >80
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM

INGROUND &
PATH WASHER
Product Code

TVL 2231

POWER	DIMENSION (in MM)
7W	Ø85x90(H)
12W	Ø110x110(H)



BEAM ANGLE : 45°
LED COLOR : 3K
BODY COLOR : SS FINISH
IP RATING : IP54
CRI : >80
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM

INGROUND &
PATH WASHER
Product Code

TVL 2232

POWER	DIMENSION (in MM)	CUTOUT (in MM)
6W	Ø83x65(H)	Ø73
12W	Ø114x63(H)	Ø100



BEAM ANGLE : 45°
LED COLOR : 3K
BODY COLOR : SS FINISH
IP RATING : IP65
CRI : >80
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM



UNDER WATER LIGHT

UNDER WATER LIGHT

Product Code

TVL 2238






POWER	DIMENSION (in MM)	CUTOUT (in MM)
3W	Ø100x23(H)	Ø75
6W	Ø100x23(H)	Ø75
9W	Ø140x23(H)	Ø110
12W	Ø140x23(H)	Ø110

BEAM ANGLE : 45°
LED COLOR : WW, GR, BL
BODY COLOR : SS FINISH
IP RATING : IP68
CRI : >80
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM + GLASS

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

UNDER WATER LIGHT

Product Code

TVL 2239






POWER	DIMENSION (in MM)
3W	Ø75x23(H)
6W	Ø75x23(H)
9W	Ø110x23(H)
12W	Ø110x23(H)

BEAM ANGLE : 45°
LED COLOR : WW, GR, BL
BODY COLOR : SS FINISH
IP RATING : IP68
CRI : >80
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM + GLASS

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

UNDER WATER LIGHT

Product Code

TVL 2240







in MM

POWER	DIMENSION
3W	Ø75x23(H)
6W	Ø75x23(H)
9W	Ø110x154(H)
12W	Ø110x154(H)

BEAM ANGLE	:	45°
LED COLOR	:	WW, GR, BL
BODY COLOR	:	SS FINISH
IP RATING	:	IP68
CRI	:	>80
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM + GLASS

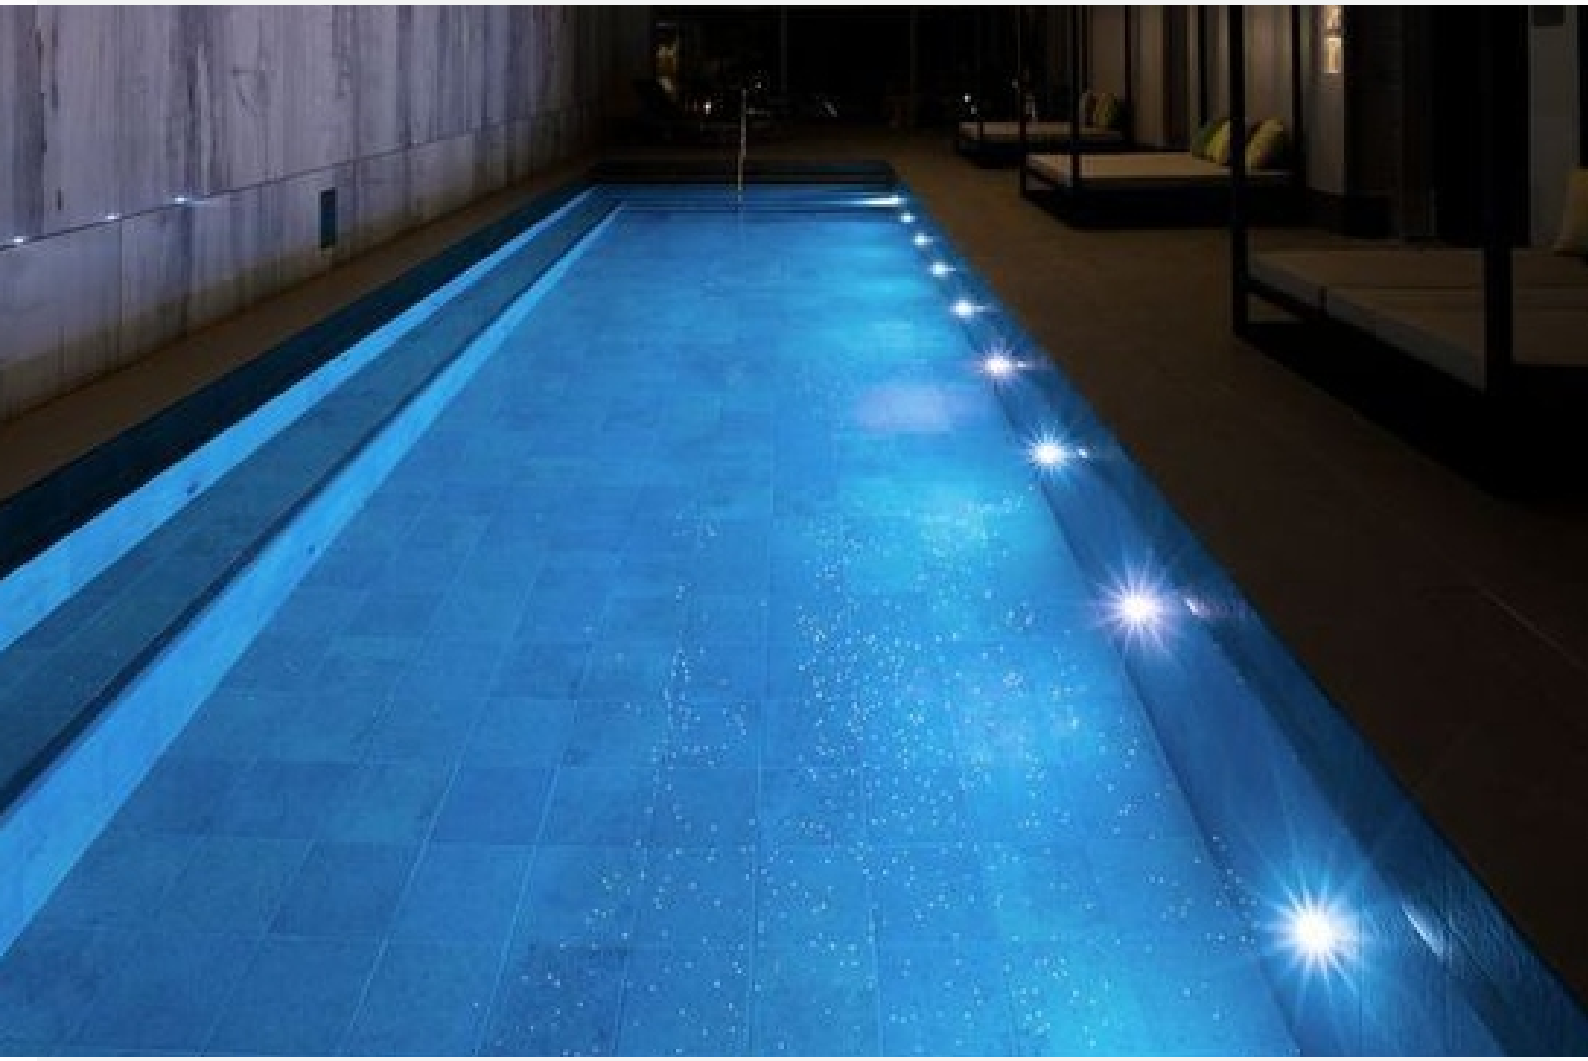


WALL WASHER LIGHT

WALL WASHER LIGHT

Product Code

TVL 2245



POWER	DIMENSION (in MM)	CUTOUT (in MM)
10W	Ø350x55x65(H)	Ø310x45x70
20W	Ø650x55x60(H)	Ø600x45x70
30W	Ø950x55x60(H)	Ø900x45x70
40W	Ø1250x55x60(H)	Ø1200x45x70

BEAM ANGLE : 15°
LED COLOR : 3K/4K
BODY COLOR : SS FINISH
IP RATING : IP65
CRI : >80
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

WALL WASHER LIGHT

Product Code

TVL 2247



POWER	DIMENSION (in MM)
11W	Ø300x43x48(H)
22W	Ø600x43x48(H)
44W	Ø1200x43x48(H)

BEAM ANGLE : 15°
LED COLOR : 3K
BODY COLOR : GREY
IP RATING : IP65
CRI : >80
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers



LED FLOOD LIGHT

LED FLOOD LIGHT

Product Code

TVL 2250



in MM

POWER	DIMENSION
30W	Ø180x60x200(H)
50W	Ø205x60x215(H)
100W	Ø245x70x270(H)
150W	Ø285x70x305(H)
200W	Ø325x80x345(H)
300W	Ø370x80x415(H)
400W	Ø500x70x465(H)

BEAM ANGLE	:	110°
LED COLOR	:	3K/6K | RD/BL/GR
BODY COLOR	:	DARK GREY
IP RATING	:	IP67
CRI	:	>80
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM + GLASS



HIGHBAY LIGHT

HIGHBAY LIGHT

Product Code

TVL 2251

in MM

POWER	DIMENSION
50W	Ø230x60(H)



BEAM ANGLE	:	120°
LED COLOR	:	3K
BODY COLOR	:	BK
IP RATING	:	IP65
CRI	:	>80
DRIVER	:	ABC
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM + GLASS

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

HIGHBAY LIGHT

Product Code

TVL 2252

in MM

POWER	DIMENSION
100W	Ø290
150W	Ø350
200W	Ø350



BEAM ANGLE	:	120°
LED COLOR	:	65K
BODY COLOR	:	BK
IP RATING	:	IP65
CRI	:	>80
DRIVER	:	ABC
INPUT VOLTAGE	:	230-240 VAC
MATERIAL	:	ALUMINIUM + GLASS

CREE bridgelux Bridging Light and Life™ b,a,g, India Reliable I Intelligent I Drivers

LED STREET LIGHT





24W 36W 50W 72W 100W 150W

TVL 2255

LED COLOR : 3K/6K | IP RATING : IP65 | BODY COLOR : DARK GREY



Where Brilliance Meet Innovation, Lighting Happens