
Where Brilliance Meet Innovation, Lighting Happens

LIGHTING CATALOGUE 2024-25

Where Brilliance Meet Innovation, Lighting Happens

15 | SERIES

Magnetic track light system

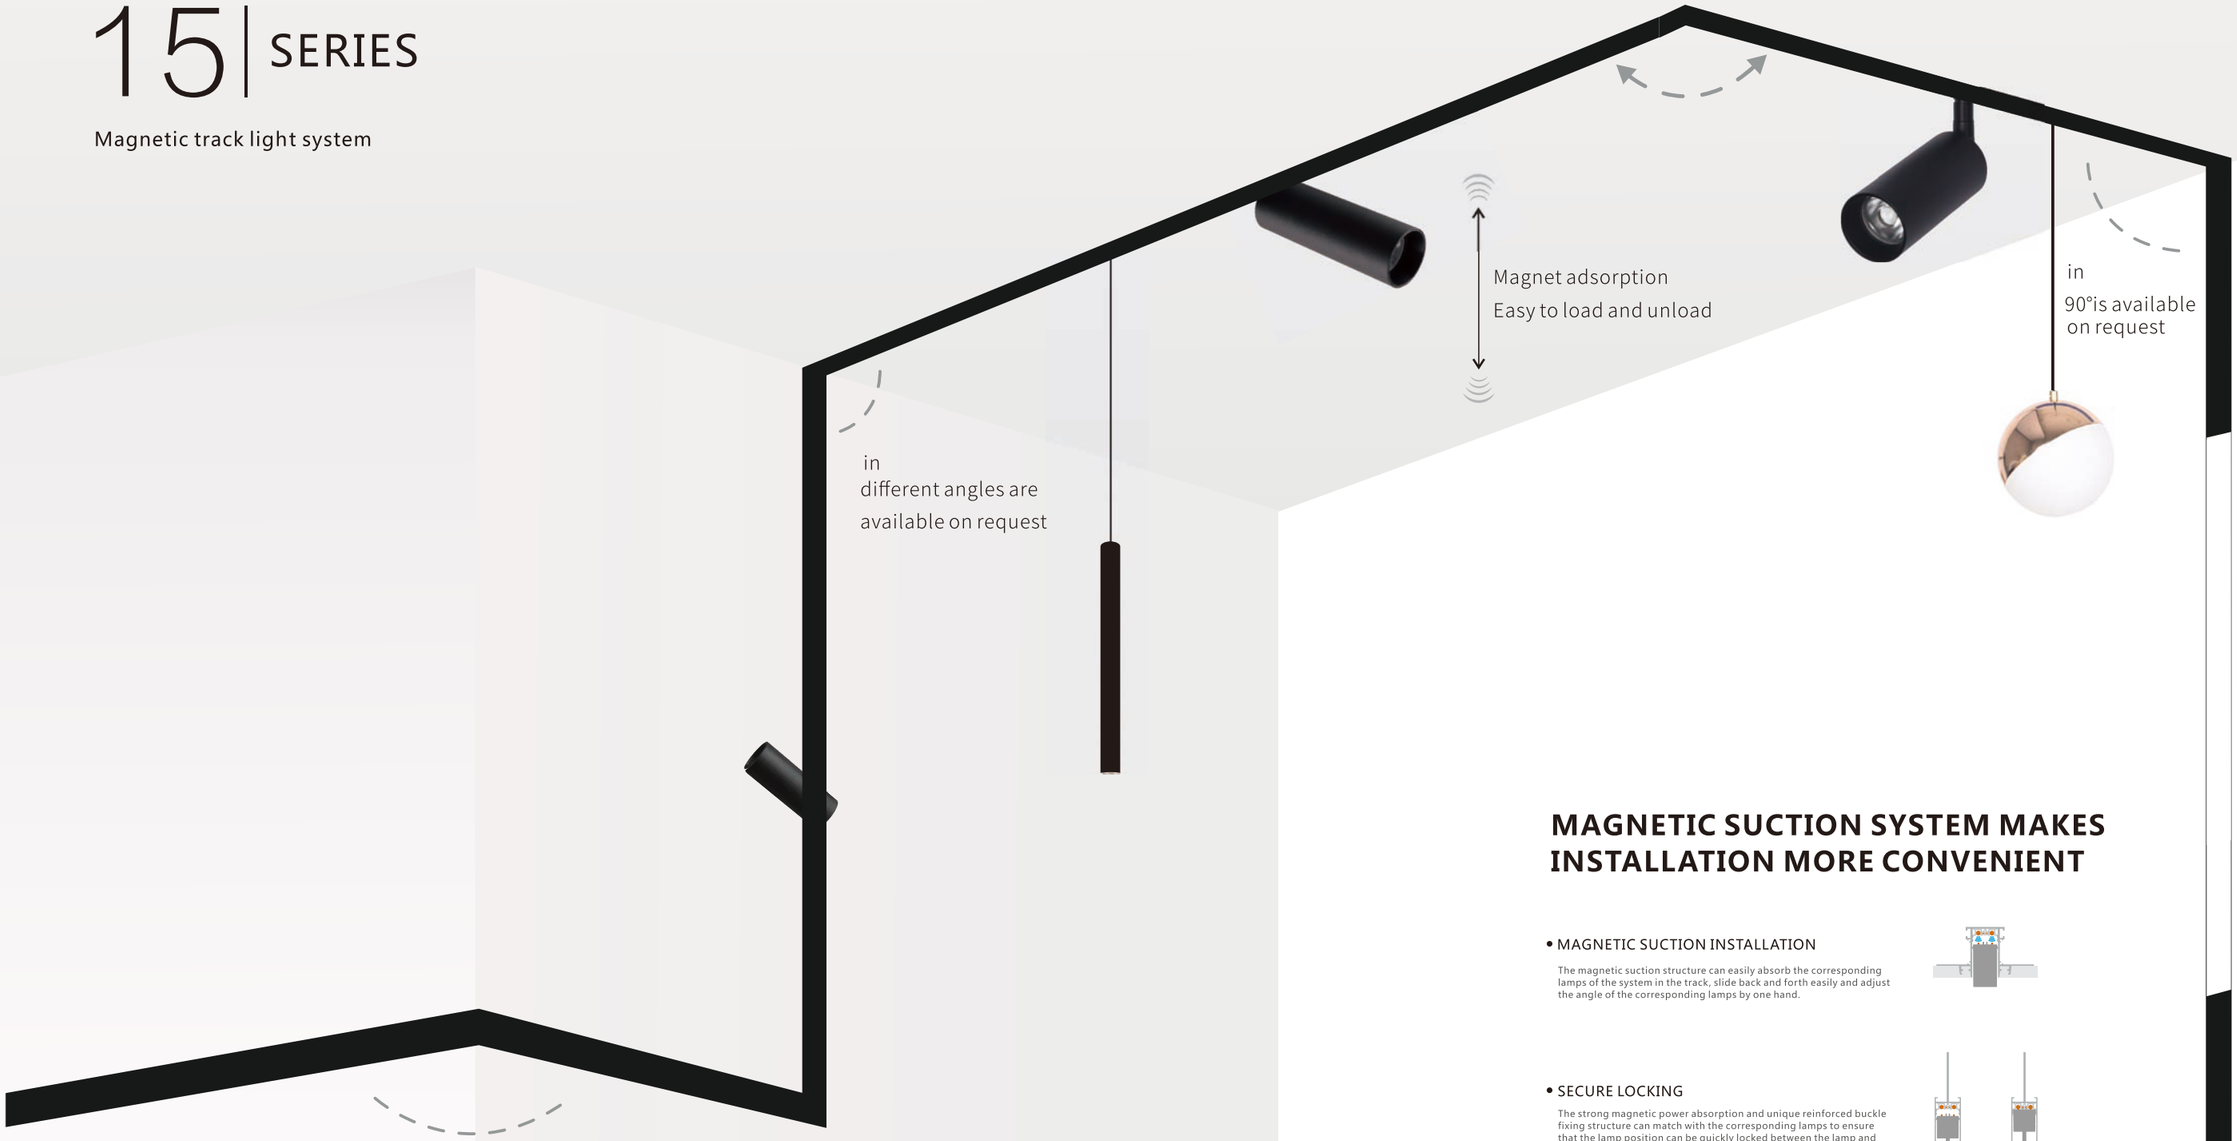

MAGNETIC SUCTION SYSTEM MAKES INSTALLATION MORE CONVENIENT

- MAGNETIC SUCTION INSTALLATION

The magnetic suction structure can easily absorb the corresponding lamps of the system in the track, slide back and forth easily and adjust the angle of the corresponding lamps by one hand.

- SECURE LOCKING

The strong magnetic power absorption and unique reinforced buckle fixing structure can match with the corresponding lamps to ensure that the lamp position can be quickly locked between the lamp and the track through magnetic force and firmly fixed on the track.

ORIGINALITY

Flexible and adaptable



M15 track as easy to install as a sureface system, but its lookslike a trimless track due to its small size and its geometric simplicity.

M15-DFS



PRODUCT INFORMATION


Model	M15-DFS
Power	10W 20W 30W
Beam angle	120 °
Color temperature	3000K/4000K/6000K
CRI	Ra90
Built-in Voltagel	48V
Finish colour	SBK/SWH
LED chip	Osram

CE CB TÜV III IP 20 | 48V | DALI SINGLE | HOT PLUG SAFE | FLICKER FREE | UGR<19

SYSTEM OPTIONS


Bluetooth 0-10V DALI Zigbee

M15 DFS-300




L300×W15×H22mm

M15 DFS-600



L600×W15×H25mm

M15 DFS-900



L900×W15×H42mm

Application scenarios: high end hotel, high-end club, luxury villa, living room, room, corridor

M15-LB



PRODUCT INFORMATION


Model	M15-LB
Power	6W 12W 18W 24W 30W
Beam angle	36 °
Color temperature	3000K/4000K/6000K
CRI	Ra90
Built-in Voltagel	48V
Finish colour	SBK/SWH
LED chip	Osram

CE CB TÜV III IP 20 | 48V | DALI SINGLE | HOT PLUG SAFE | FLICKER FREE | UGR<19

SYSTEM OPTIONS


Bluetooth 0-10V DALI Zigbee

M15 LB-6W




L118×W15×H42mm

M15 LB-12W




L232×W15×H42mm

M15 LB-18W




L232×W15×H42mm

M15 LB-24W



L345×W15×H42mm


M15 LB-30W



L460×W15×H42mm

Application scenarios: high end hotel, high-end club, luxury villa, living room, room, corridor

M15-DFSM



PRODUCT INFORMATION


Model	M15-DFSM
Power	6W 12W
Beam angle	120°
Color temperature	3000K/4000K/6000K
CRI	Ra90
Built-in Voltagel	48V
Finish colour	SBK/SWH
LED chip	Osram

CE CB TÜV III IP 20 48V DALI SINGLE HOT PLUG SAFE FLICKER FREE UGR<19

SYSTEM OPTIONS


Bluetooth 0-10V DALI Zigbee

M15 DFSM-6W



L118×W15×H100mm

M15 DFSM-12W



L232×W15×H100mm

Application scenarios: high end hotel, high-end club, luxury villa, living room, room, corridor

M15-LBM



PRODUCT INFORMATION


Model	M15-LBM
Power	6W 12W
Beam angle	36 °
Color temperature	3000K/4000K/6000K
CRI	Ra90
Built-in Voltagel	48V
Finish colour	SBK/SWH
LED chip	Osram

CE CB TÜV III IP 20 48V DALI SINGLE HOT PLUG SAFE FLICKER FREE UGR<19

SYSTEM OPTIONS


Bluetooth 0-10V DALI Zigbee

M15 LBM-6W




L118×W15×H100mm

M15 LBM-12W



L232×W15×H100mm

Application scenarios: high end hotel, high-end club, luxury villa, living room, room, corridor

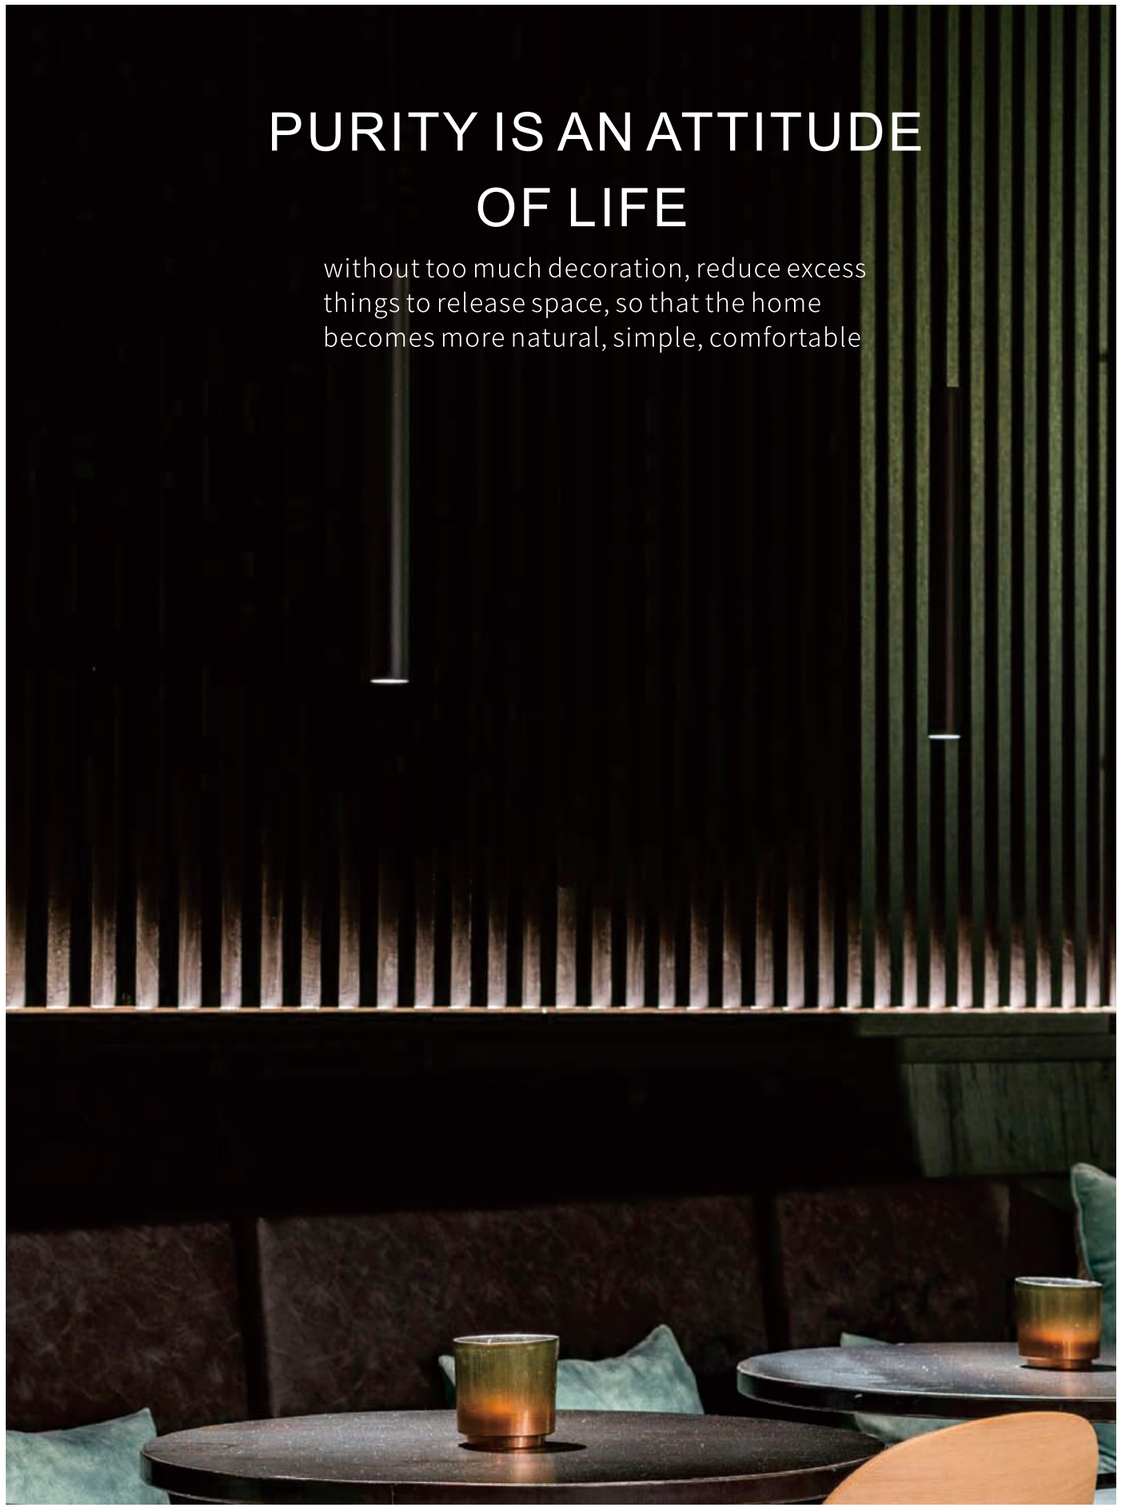

M15-FM3



PRODUCT INFORMATION


Model	M15-FM3
Power	5W
Beam angle	24 °
Color temperature	3000K/4000K/6000K
CRI	Ra90
Built-in Voltagel	48V
Finish colour	SBK/SWH
LED chip	Bridgelux

CE CB TÜV III IP 20 | 48V | DALI SINGLE | HOT PLUG SAFE | FLICKER FREE | UGR<19

SYSTEM OPTIONS

Bluetooth 0-10V DALI Zigbee

M15 FM3-5W



Φ25*300mm

Application scenarios: high end hotel, high-end club, luxury villa, living room, room, corridor

M15-TL3



PRODUCT INFORMATION


Model	M15-TL3
Power	5W 7W 12W 15W 18W
Beam angle	24 °
Color temperature	3000K/4000K/6000K
CRI	Ra90
Built-in Voltagel	48V
Finish colour	SBK/SWH
LED chip	Bridgelux

CE CB TÜV III IP 20 48V DALI SINGLE HOT PLUG SAFE FLICKER FREE UGR<19

SYSTEM OPTIONS


Bluetooth 0-10V DALI Zigbee

M15 TL3-5W




Φ30*H70mm

M15 TL3-12W




Φ45*H90mm

M15 TL3-12W




Φ45*H130mm

M15 TL3-15W



Φ57*H105mm

M15 TL3-18W



Φ57*H135mm

Application scenarios: high end hotel, high-end club, luxury villa, living room, room, corridor

M15-TB



PRODUCT INFORMATION


Model	M15-TB
Power	6W 12W
Beam angle	120 °
Color temperature	3000K/4000K/6000K
CRI	Ra90
Built-in Voltagel	48V
Finish colour	SBK/SWH
LED chip	Osram

CE CB TÜV III IP 20 48V DALI SINGLE HOT PLUG SAFE FLICKER FREE UGR<19

SYSTEM OPTIONS


Bluetooth 0-10V DALI Zigbee

M15 TB-300



27.7×300mm

M15 TB-600



27.7×600mm

Application scenarios: high end hotel, high-end club, luxury villa, living room, room, corridor

M15-PB



PRODUCT INFORMATION


Model	M15-PB
Power	7W
Beam angle	120 °
Color temperature	3000K/4000K/6000K
CRI	Ra90
Built-in Voltagel	48V
Finish colour	SBK/SWH/GD
LED chip	Bridgelux

CE CB TÜV III IP 20 | 48V | DALI SINGLE | HOT PLUG SAFE | FLICKER FREE | UGR<19

SYSTEM OPTIONS

Bluetooth 0-10V DALI Zigbee

M15 PB-7W



ΦΦ100mm

Application scenarios: high end hotel, high-end club, luxury villa, living room, room, corridor

M15-SPB



PRODUCT INFORMATION


Model	M15-SPB
Power	7W
Beam angle	120 °
Color temperature	3000K/4000K/6000K
CRI	Ra90
Built-in Voltagel	48V
Finish colour	SBK/SWH/GD
LED chip	Bridgelux

CE CB TÜV III IP 20 | 48V | DALI SINGLE | HOT PLUG SAFE | FLICKER FREE | UGR<19

SYSTEM OPTIONS

Bluetooth 0-10V DALI Zigbee

M15 SPB-7W



Φ100×166.4×135mm

Application scenarios: high end hotel, high-end club, luxury villa, living room, room, corridor


M15-TRACK RAIL



M15-S15-E
size : L1000*2000*3000mm
Installation : Surface mounted or suspendant
Input : 48V DC
Finish colour : SBK/SWH



M15-S15
size : L1000*2000*3000mm
Installation : Surface mounted or suspendant
Input : 48V DC
Finish colour : SBK/SWH

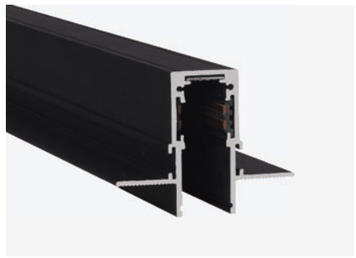

M15-R15-2
size : L1000*2000*3000mm
Installation : Recessed for the gypusm board
Input : 48V DC
Finish colour : SBK/SWH



M15-R15-2E
size : L1000*2000*3000mm
Installation : Recessed for the gypusm board
Input : 48V DC
Finish colour : SBK/SWH



M15-48V-80W
Finish colour : SK/WH



M15-48V-150W
Finish colour : SK/WH



connector module



Input module



Straight connector





M20

Magnetic series

Application scenarios: high end hotel, high-end club, luxury villa, living room, room, corridor

ORIGINALITY

Flexible and adaptable

M20-DFS



PRODUCT INFORMATION


Model	M20-DFS
Power	10W 20W 30W 40W
Beam angle	120 °
Color temperature	3000K/4000K/6000K
CRI	Ra90
Built-in Voltagel	48V
Finish colour	SBK/SWH
LED chip	Osram

CE CB TÜV III IP 20 48V DALI SINGLE HOT PLUG SAFE FLICKER FREE UGR<19

SYSTEM OPTIONS


Bluetooth 0-10V DALI Zigbee

M20 DFS-30




L300×W22×H25mm

M20 DFS-60




L600×W22×H25mm

M20 DFS-90



L900×W22×H25mm

M20 DFS-120



L1200×W22×H25mm

Application scenarios: high end hotel, high-end club, luxury villa, living room, room, corridor

M20-LB



PRODUCT INFORMATION


Model	M20-LB
Power	6W 12W 18W 24W
Beam angle	24 ° 36 °
Color temperature	3000K/4000K/5000K
CRI	Ra90
Built-in Voltagel	48V
Finish colour	SBK/SWH
LED chip	Osram

CE CB TÜV III IP 20 48V DALI SINGLE HOT PLUG SAFE FLICKER FREE UGR<19

SYSTEM OPTIONS


Bluetooth 0-10V DALI Zigbee

M20 LB6




L112×W22×H25mm

M20 LB12




L220×W22×H25mm

M20 LB18



L328×W22×H25mm


M20 LB24



L435×W22×H25mm

Application scenarios: high end hotel, high-end club, luxury villa, living room, room, corridor

M20-DFS-90



PRODUCT INFORMATION


Model	M20-DFS-90
Power	16W
Beam angle	120 °
Color temperature	3000K/4000K/6000K
CRI	Ra90
Built-in Voltagel	48V
Finish colour	SBK/SWH
LED chip	Osram

CE CB TÜV III IP 20 | 48V | DALI SINGLE | HOT PLUG SAFE | FLICKER FREE | UGR<19

SYSTEM OPTIONS

Bluetooth 0-10V DALI Zigbee

M20 DFS-90 °



L325×W305×H25mm

Application scenarios: high end hotel, high-end club, luxury villa, living room, room, corridor

M20-TL



PRODUCT INFORMATION


Model	M20-TL
Power	7W 12W 15W 20W
Beam angle	15 ° 24 ° 36 °
Color temperature	3000K/4000K/6000K
CRI	Ra90
Built-in Voltagel	48V
Finish colour	SBK/SWH/GD
LED chip	Bridgelux

CE CB TÜV III IP 20 | 48V | DALI SINGLE | HOT PLUG SAFE | FLICKER FREE | UGR<19

SYSTEM OPTIONS


Bluetooth 0-10V DALI Zigbee

M20 TL-7W




Φ40*H90mm

M20 TL-12W




Φ50*H136mm

M20 TL-15W




Φ62*H147mm

M20 TL-20W



Φ75*H158mm

Application scenarios: high end hotel, high-end club, luxury villa, living room, room, corridor

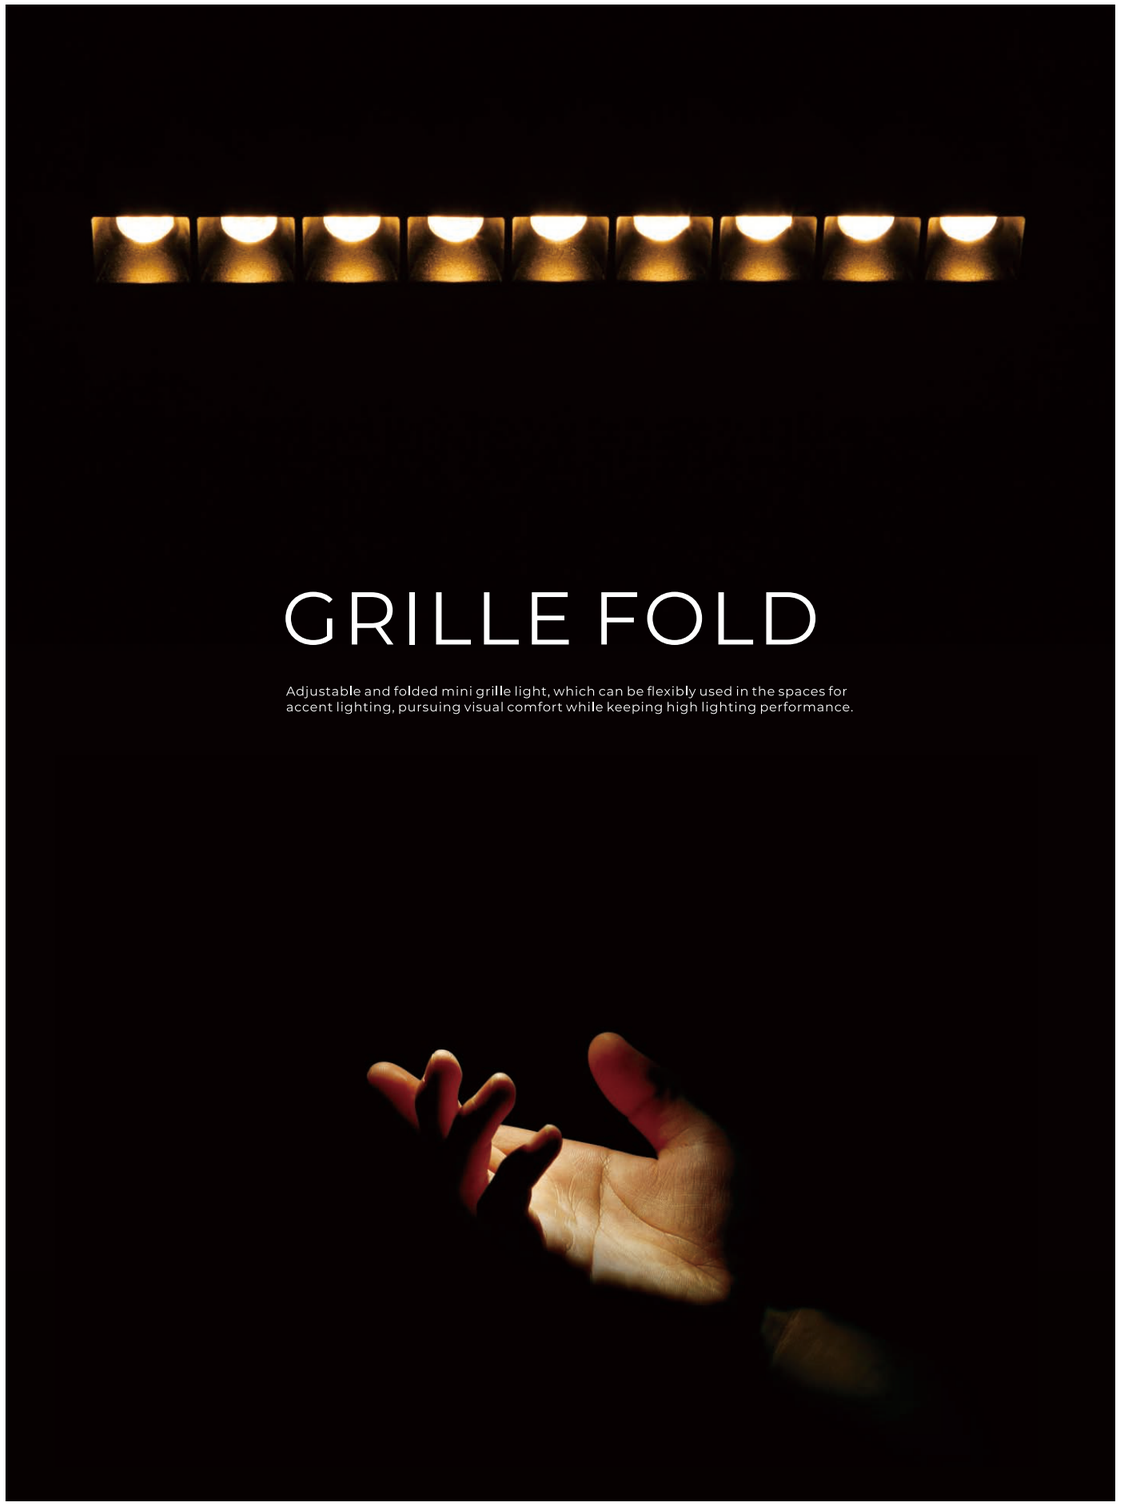

GRILLE FOLD

Adjustable and folded mini grille light, which can be flexibly used in the spaces for accent lighting, pursuing visual comfort while keeping high lighting performance.

M20-LBM




PRODUCT INFORMATION

Model	M20-LBM
Power	6W 12W
Beam angle	24° 36°
Color temperature	3000K/4000K/6000K
CRI	Ra90
Built-in Voltagel	48V
Finish colour	SBK/SWH
LED chip	Osram


SYSTEM OPTIONS

M20 LBM-6W



L113×W22×H55mm

M20 LBM-12W



L226×W22×H55mm

Application scenarios: high end hotel, high-end club, luxury villa, living room, room, corridor

M20-LBM2



PRODUCT INFORMATION


Model	M20-LBM2
Power	15W 25W
Beam angle	24° 36°
Color temperature	3000K/4000K/6000K
CRI	Ra90
Built-in Voltagel	48V
Finish colour	SBK/SWH
LED chip	Osram

CE CB TÜV III IP 20 48V DALI SINGLE HOT PLUG SAFE FLICKER FREE UGR<19

SYSTEM OPTIONS


Bluetooth 0-10V DALI Zigbee

M20 LBM2-15W



L115×W22×H120mm


M20 LBM2-25W



L230×W22×H145mm

Application scenarios: high end hotel, high-end club, luxury villa, living room, room, corridor

M20-DFSM



PRODUCT INFORMATION


Model	M20-DFSM
Power	6W 12W
Beam angle	120 °
Color temperature	3000K/4000K/6000K
CRI	Ra90
Built-in Voltagel	48V
Finish colour	SBK/SWH
LED chip	Osram

CE CB TÜV III IP 20 48V DALI SINGLE HOT PLUG SAFE FLICKER FREE UGR<19

SYSTEM OPTIONS


Bluetooth 0-10V DALI Zigbee

M20 DFSM-6W



L113×W22×H55mm

M20 DFSM-12W



L226×W22×H55mm

Application scenarios: high end hotel, high-end club, luxury villa, living room, room, corridor



M20-DFSM2



PRODUCT INFORMATION


Model	M20-DFSM2
Power	15W 25W
Beam angle	120 °
Color temperature	3000K/4000K/6000K
CRI	Ra90
Built-in Voltagel	48V
Finish colour	SBK/SWH
LED chip	Osram

CE CB TÜV III IP 20 48V DALI SINGLE HOT PLUG SAFE FLICKER FREE UGR<19

SYSTEM OPTIONS


Bluetooth 0-10V DALI Zigbee

M20 DFSM2-15W



L115×W22×H120mm

M20 DFSM2-25W



L230×W22×H145mm

Application scenarios: high end hotel, high-end club, luxury villa, living room, room, corridor

M20-PB



PRODUCT INFORMATION


Model	M20-PB
Power	7W
Beam angle	120 °
Color temperature	3000K/4000K/6000K
CRI	Ra90
Built-in Voltagel	48V
Finish colour	WH+BK/GD
LED chip	Osram

CE CB TÜV III IP 20 | 48V | DALI SINGLE | HOT PLUG SAFE | FLICKER FREE | UGR<19

SYSTEM OPTIONS

Bluetooth 0-10V DALI Zigbee

M20 PB-7W



Φ100mm

Application scenarios: high end hotel, high-end club, luxury villa, living room, room, corridor

M20-TB



PRODUCT INFORMATION


Model	M20-TB
Power	6W 12W
Beam angle	120 °
Color temperature	3000K/4000K/6000K
CRI	Ra90
Built-in Voltagel	48V
Finish colour	WH
LED chip	Osram

CE CB TÜV III IP 20 | 48V | DALI SINGLE | HOT PLUG SAFE | FLICKER FREE | UGR<19

SYSTEM OPTIONS


Bluetooth 0-10V DALI Zigbee

M20 TB-300



300×Φ26mm

M20 TB-600



600×Φ26mm

Application scenarios: high end hotel, high-end club, luxury villa, living room, room, corridor

M20-FM1



PRODUCT INFORMATION


Model	M20-FM1
Power	9W
Beam angle	18 ° 25 ° 35 °
Color temperature	3000K/4000K/6000K
CRI	Ra90
Built-in Voltagel	48V
Finish colour	SBK/SWH
LED chip	Bridgelux

CE CB TÜV III IP 20 | 48V DALI SINGLE HOT PLUG SAFE FLICKER FREE UGR<19

SYSTEM OPTIONS

Bluetooth 0-10V DALI Zigbee

M20 FM1-7W



Φ40×300mm

Application scenarios: high end hotel, high-end club, luxury villa, living room, room, corridor

M20-FM2



PRODUCT INFORMATION


Model	M20-FM2
Power	9W
Beam angle	18 ° 25 ° 35 °
Color temperature	3000K/4000K/6000K
CRI	Ra90
Built-in Voltagel	48V
Finish colour	SBK/SWH
LED chip	Bridgelux

CE CB TÜV III IP 20 | 48V DALI SINGLE HOT PLUG SAFE FLICKER FREE UGR<19

SYSTEM OPTIONS

Bluetooth 0-10V DALI Zigbee

M20 FM2-7W



Φ60×300mm

Application scenarios: high end hotel, high-end club, luxury villa, living room, room, corridor

M20-TRACK RAIL



M20-R20-1
size : L1000*2000*3000mm
Installation : Surface mounted or suspendant
Input : 48V DC
Finish colour : SBK/SWH



M20-R20-2 magnet track
size : L1000*2000*3000mm
Installation : Recessed for the gypusm board
Input : 48V DC
Finish colour : Oxidating black/SWH



M20-R20-2E magnet track
size : L1000*2000*3000mm
Installation : Recessed for the gypusm board
Input : 48V DC
Finish colour : Oxidating black/SWH



M20-R20-4 magnet track
size : L1000*2000*3000mm
Installation : Recessed for the gypusm board
Input : 48V DC
Finish colour : SBK/SWH



M20-R20-5 magnet track
size : L1000*2000*3000mm
Installation : Recessed for the gypusm board
Input : 48V DC
Finish colour : Oxidating black/SWH



M20-RM magnet track
size : L1000*2000*3000mm
Installation : Recessed for the gypusm board
Input : 48V DC
Finish colour : SBK/SWH




M20-RM-4 magnet track
size : L1000*2000*3000mm
Installation : Recessed for the gypusm board
Input : 48V DC
Finish colour : SBK/SWH



M20-S20 magnet track
size : L1000*2000*3000mm
Installation : Surface mounted or suspendant
Input : 48V DC
Finish colour : SBK/SWH



M20-S20-1 magnet track
size : L1000*2000*3000mm
Installation : Surface mounted or suspendant
Input : 48V DC
Finish colour : SBK/SWH

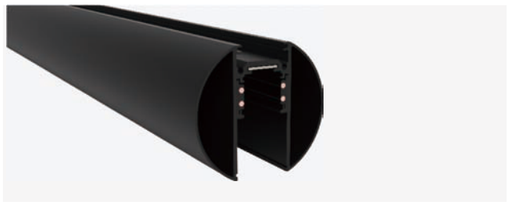

M20-S20-2 magnet track
size : L1000*2000*3000mm
Installation : Surface mounted or suspendant
Input : 48V DC
Finish colour : SBK/SWH



M20-SM magnet track
size : L1000*2000*3000mm
Installation : Recessed for the gypusm board
Input : 48V DC
Finish colour : SBK/SWH



connector module



Inbuilt driver 200W



Input module



Straight connector



R20-2 end-cap



S20end-cap



R20-2 Profile jointer



S20 Profile jointer



S20 Surface clip



S20 Hanging kit