BRILLUME
Refined Elegance

www.brillume.co.in

XENEX
24

SURFACE / SUSPENDED LUMINAIRE

Engineered for refined
architectural environments.



POWER	BEAM ANGLE	LUMINOUS FLUX	CRI	UGR
10w	120°	900 / 850 / 800 lm	80	< 19

APPLICATION AREAS

Office buildings | Retail | Supermarkets | Hospitality | Library

TECHNICAL SPECIFICATIONS

CONSTRUCTION & MATERIALS

Size Out Side (mm)	5000×8×3
Cut Out Size (mm)	N/A
Housing	N/A
Lens / Diffuser	N/A
Reflector	N/A
Surface Finish	N/A
IP Rating	IP 40

THERMAL MANAGEMENT

Heat Sink Material	N/A
Cooling Technique	N/A

OPTICAL SYSTEM

Beam Angle	120°
Illumination Mode	Direct Lighting
Swivel	No

Technical parameters are subjected to change time to time
in order to improve product performance and reliability.

LIGHT TECHNOLOGY

LED Fitted	Bridgelux
Delivered Lumens	900 / 850 / 800
CCT (K)	6000 / 4000 / 3000
Tunable	On Request
LED Binning	5 Step MacAdam
CRI (Ra)	80
LED Life L70	45,000 HRS
Luminaire	900 / 850 / 800
Luminous Efficacy	90 Lumens / Watt


ELECTRICAL SYSTEM

(UGR)	< 19
Input Voltage	24VDC
Input Power	10w
Power Factor	N/A
THD	N/A
Control Gear	N/A
Driver Protection	N/A
Dimming	N/A
Emergency	BACKUP N/A
Battery Backup	N/A


PACKAGING DETAILS

Packing Qty - **Gross Weight** - **Carton Size (L x B x H)** (LXBXH) -

DIMENSIONS (MM)

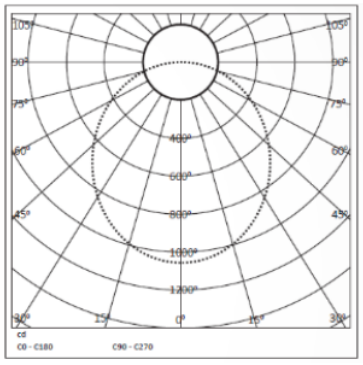

PHOTOMETRIC

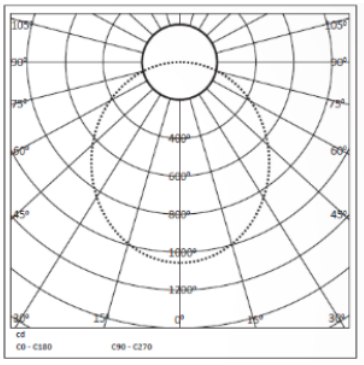

Brillume Lighting Solutions Pvt. Ltd.
Office No. 87, Upper Floor,
Om Heera Panna, Oshiwara,
Andheri West, Mumbai — 400 102

+91 91674 23259

manoj@brillume.co.in