
BRILLUME
Refined Elegance

www.brillume.co.in

VOXUN

SURFACE / SUSPENDED LUMINAIRE

Engineered for refined
architectural environments.

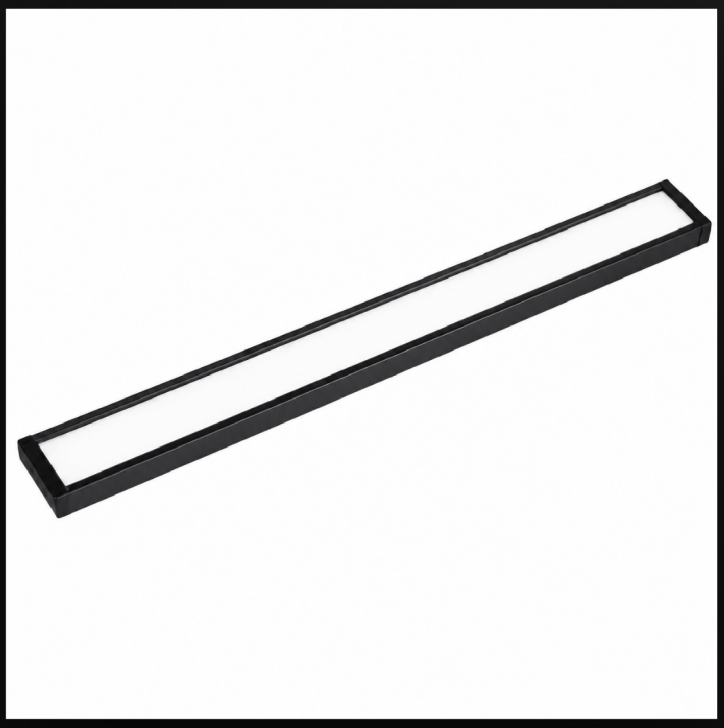

POWER	BEAM ANGLE	LUMINOUS FLUX	CRI	UGR
30W	110°	4200 / 4050 / 3900 lm	80 / 90	< 19

APPLICATION AREAS

Residential | Office buildings | Retail | Sports facilities | Studio | Stage | Supermarkets | Library

TECHNICAL SPECIFICATIONS

CONSTRUCTION & MATERIALS

Size Out Side (mm)	1193×104×40
Cut Out Size (mm)	1193×104×40
Housing	Extruded Aluminium
Lens / Diffuser	High Transmission PS
Reflector	N/A
Surface Finish	WHITE POWDER COATED
IP Rating	IP 44

THERMAL MANAGEMENT

Heat Sink Material	Aluminium
Cooling Technique	Passive

OPTICAL SYSTEM

Beam Angle	110°
Illumination Mode	Indirect Lighting
Swivel	No

Technical parameters are subjected to change time to time
in order to improve product performance and reliability.

LIGHT TECHNOLOGY

LED Fitted	Bridgelux
Delivered Lumens	3900 / 3750 / 3600
CCT (K)	6000 / 4000 / 3000
Tunable	On Request
LED Binning	3 Step MacAdam
CRI (Ra)	80 / 90
LED Life L70	45,000 HRS
Luminaire	4200 / 4050 / 3900 lm
Luminous Efficacy	130 Lumens / Watt

ELECTRICAL SYSTEM

(UGR)	< 19
Input Voltage	220 TO 240 Vac
Input Power	30W
Power Factor	>0.95
THD	<10%
Control Gear	Remote
Driver Protection	OVP,Short Circuit,Surge
Dimming	OPTION/AL
Emergency	BATTERY BACKUP On Request
Battery Backup	Request Battery Backup


PACKAGING DETAILS

Packing Qty - **Gross Weight** - **Carton Size (L x B x H)** (LXBXH) -

DIMENSIONS (MM)



PHOTOMETRIC

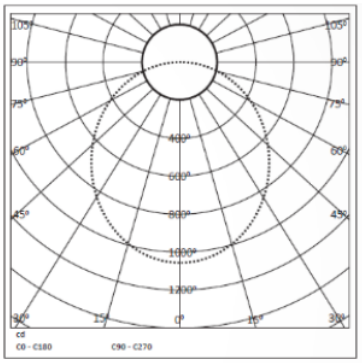

Brillume Lighting Solutions Pvt. Ltd.
Office No. 87, Upper Floor,
Om Heera Panna, Oshiwara,
Andheri West, Mumbai — 400 102

+91 91674 23259

manoj@brillume.co.in